



700 Series

Ranges 700

GAS RANGE, CG7-20

1120130100

DIMENSIONS

		Article	Packed	
Length	mm	350,00	390,00	GAS RANGE, CG7-20
Depth	mm	775,00	840,00	Made of stainless steel.
Height	mm	290,00	530,00	Open hobs with safety valve and thermocouples.
Weight	Kg	35,00	43,00	Pilots for ignition.
Volume	m3	0,08	0,17	Cast iron gratings and burners.
				Burners: 2 x 5,000 kcal/h
				Dimensions of the grill: 347x310 mm.
				Total power: 10.000 Kcal/h. (11.6 kW).
				Dimensions: 350 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power		KW	11,60
		Kcal/h	9.976,00
LPG	Consumption (kg/h)		0,66
	Pressure (g/cm2)		37,00
Natural gas	Consumption (m3/h)		0,83
	Pressure (g/cm2)		18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	310	494	0	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-20 H

1120130120

DIMENSIONS

		Article	Packed	GAS RANGE, CG7-20 H Made of stainless steel. Open hobs with safety valve and thermocouples. Pilots for ignition. Cast iron gratings and burners. Burners: 2 x 7,000 kcal/h Dimensions of the grill: 347x310 mm. Total power: 14,000 Kcal/h. (16.3 kW). Dimensions: 350 x 775 x 290 mm.
Length	mm	350,00	390,00	
Depth	mm	775,00	840,00	
Height	mm	290,00	515,00	
Weight	Kg	35,00	43,00	
Volume	m3	0,08	0,17	

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	16,30
	Kcal/h	14.018,00
LPG	Consumption (kg/h)	1,48
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	1,90
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	310	494	0	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-40

1120130200

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	700,00	740,00
Depth	mm	775,00	845,00
Height	mm	290,00	515,00
Weight	Kg	61,00	75,00
Volume	m3	0,16	0,32

GAS RANGE, CG7-40
 Made of stainless steel.
 Open hobs with safety valve and thermocouples.
 Pilots for ignition.
 Cast iron gratings and burners.
 Burners: 1 x 7,000 + 3 x 5,000 kcal/h
 Dimensions of the grill: 347x310 mm.
 Total power: 22.000 Kcal/h. (25.6 kW).
 Dimensions: 700 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	25,60
	Kcal/h	22.016,00
LPG	Consumption (kg/h)	1,56
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	2,09
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
GAS	660	494	0	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-40 H

1120130220

DIMENSIONS

		Article	Packed
Length	mm	700,00	740,00
Depth	mm	775,00	845,00
Height	mm	290,00	515,00
Weight	Kg	61,00	75,00
Volume	m3	0,16	0,32

GAS RANGE, CG7-40 H

Made of stainless steel.

Open hobs with safety valve and thermocouples.

Pilots for ignition.

Cast iron gratings and burners.

Burners: 4 x 7000 kcal/h

Dimensions of the grill: 347x310 mm.

Total power: 28,000 Kcal/h. (32.6 kW).

Dimensions: 700 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	32,60
	Kcal/h	28.036,00
LPG	Consumption (kg/h)	3,00
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	3,85
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	660	494	0	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-41

1120130500

DIMENSIONS

		Article	Packed
Length	mm	700,00	745,00
Depth	mm	775,00	835,00
Height	mm	850,00	1.060,00
Weight	Kg	134,00	152,00
Volume	m3	0,46	0,66

GAS RANGE, CG7-41

Made of stainless steel.

Open hobs with safety valve and thermocouples.

Pilots for ignition.

Cast iron gratings and burners.

Burners: 1 x 7,000 + 3 x 5,000 kcal/h

Dimensions of the grill: 347x310 mm.

2/1 GN oven made of stainless steel, with tubular burner in stainless steel.

Pilot and thermocouple.

Thermostatic control (130 °C – 350 °C).

Oven burner: 6,000 kcal/h.

Total power: 28.000 Kcal/h. (32.6 kW).

Dimensions: 700 x 775 x 850 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power		KW	32,60
		Kcal/h	28.036,00
LPG	Consumption (kg/h)		2,19
	Pressure (g/cm2)		37,00
Natural gas	Consumption (m3/h)		2,78
	Pressure (g/cm2)		18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	660	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-41 H

1120130520

DIMENSIONS

		Article	Packed	GAS RANGE, CG7-41 H Made of stainless steel. Open hobs with safety valve and thermocouples. Pilots for ignition. Cast iron gratings and burners. Burners: 4 x 7,000 kcal/h Dimensions of the grill: 347x310 mm. 2/1 GN oven made of stainless steel, with tubular burner in stainless steel.
Length	mm	700,00	745,00	
Depth	mm	775,00	835,00	
Height	mm	850,00	1.060,00	
Weight	Kg	134,00	152,00	
Volume	m3	0,46	0,66	

ELECTRICITY

	0,00	Pilot and thermocouple. Thermostatic control (130 °C - 350 °C). Oven burner: 6,000 kcal/h. Total power: 34,000 Kcal/h. (39.5 kW). Dimensions: 700 x 775 x 850 mm
--	------	--

PLUMBING - WATER

GAS

Power	KW	39,50
	Kcal/h	33.970,00
LPG	Consumption (kg/h)	3,15
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	4,23
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	660	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-61

1120130600

DIMENSIONS

		Article	Packed
Length	mm	1.050,00	1.090,00
Depth	mm	775,00	855,00
Height	mm	850,00	1.090,00
Weight	Kg	155,00	196,50
Volume	m3	0,69	1,02

ELECTRICITY

0,00

GAS RANGE, CG7-61
 Made of stainless steel.
 Open hobs with safety valve and thermocouples.
 Pilots for ignition. Cast iron gratings and burners.
 Burners: 2 x 7,000 + 4 x 5,000 kcal/h
 Dimensions of the grill: 347x310 mm.
 2/1 GN oven made of stainless steel, with tubular burner in stainless steel.
 Pilot and thermocouple.
 Thermostatic control (130 °C - 350 °C).
 Oven burner: 6,000 kcal/h.
 Auxiliary neutral cabinet.
 Total power: 40.000 Kcal/h. (46.5 kW).
 Dimensions: 1050 x 775 x 850 mm.

PLUMBING - WATER

GAS

Power	KW	46,50
	Kcal/h	39.990,00
LPG	Consumption (kg/h)	3,10
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	3,93
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	1.010	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-61 H

1120130620

DIMENSIONS

		Article	Packed
Length	mm	1.050,00	1.090,00
Depth	mm	775,00	855,00
Height	mm	850,00	1.090,00
Weight	Kg	155,00	196,50
Volume	m3	0,69	1,02

GAS RANGE, CG7-61 H

Made of stainless steel.

Open hobs with safety valve and thermocouples.

Pilots for ignition.

Cast iron gratings and burners.

Burners: 6 x 7,000 kcal/h

Dimensions of the grill: 347x310 mm.

2/1 GN oven made of stainless steel, with tubular burner in stainless steel.

Pilot and thermocouple.

Thermostatic control (130 °C - 350 °C).

Oven burner: 6,000 kcal/h.

Auxiliary neutral cabinet.

Total power: 48.000 Kcal/h. (55.8 kW).

Dimensions: 1050 x 775 x 850 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power		KW	55,80
		Kcal/h	47.988,00
LPG	Consumption (kg/h)		4,30
	Pressure (g/cm2)		37,00
Natural gas	Consumption (m3/h)		5,50
	Pressure (g/cm2)		18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	1.010	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CGB7-61

1120130700

DIMENSIONS

		Article	Packed
Length	mm	1.050,00	1.090,00
Depth	mm	775,00	855,00
Height	mm	850,00	1.090,00
Weight	Kg	155,00	196,50
Volume	m3	0,69	1,02

GAS RANGE, CGB7-61

Made of stainless steel.

Open hobs with safety valve and thermocouples.

Pilots for ignition.

Cast iron gratings and burners.

Burners: 2 x 7,000 + 4 x 5,000 kcal/h

Dimensions of the grill: 347x310 mm.

UK style oven made of stainless steel, with temperature gradient from top to bottom of oven.

Pilot and thermocouple.

Thermostatic control (130 °C – 350 °C).

Double side door.

Oven burner: 7,650 kcal/h. (8.9 kW).

Total power: 41,650 Kcal/h. (48.4 kW).

Dimensions: 1050 x 775 x 850 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power		KW	48,40
		Kcal/h	41.624,00
LPG	Consumption (kg/h)		3,10
	Pressure (g/cm2)		37,00
Natural gas	Consumption (m3/h)		3,93
	Pressure (g/cm2)		18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	1.010	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CGB7-61 R

1120130703

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	1.050,00	1.090,00
Depth	mm	775,00	855,00
Height	mm	850,00	1.090,00
Weight	Kg	155,00	196,50
Volume	m3	0,69	1,02

ELECTRICITY

0,00

GAS RANGE, CGB7-61 R

Model with castors.

Made of stainless steel.

Open hobs with safety valve and thermocouples.

Pilots for ignition.

Cast iron gratings and burners.

Burners: 2 x 7,000 + 4 x 5,000 kcal/h

Dimensions of the grill: 347x310 mm.

UK style oven made of stainless steel, with temperature gradient from top to bottom of oven.

Pilot and thermocouple.

Thermostatic control (130 °C - 350 °C).

Double side door.

Oven burner: 7,650 kcal/h. (8.9 kW).

Total power: 41,650 Kcal/h. (48.4 kW).

Dimensions: 1050 x 775 x 850 mm.

PLUMBING - WATER

GAS

Power		KW	48,40
		Kcal/h	41.624,00
LPG	Consumption (kg/h)		3,10
	Pressure (g/cm2)		37,00
Natural gas	Consumption (m3/h)		3,93
	Pressure (g/cm2)		18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
GAS	1.010	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CGB7-61 H

1120130720

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	1.050,00	1.090,00
Depth	mm	775,00	855,00
Height	mm	850,00	1.090,00
Weight	Kg	155,00	196,50
Volume	m3	0,69	1,02

GAS RANGE, CGB7-61 H

Made of stainless steel.

Open hobs with safety valve and thermocouples.

Pilots for ignition.

Cast iron gratings and burners.

Burners: 6 x 7,000 kcal/h

Dimensions of the grill: 347x310 mm.

UK style oven made of stainless steel, with temperature gradient from top to bottom of oven.

Pilot and thermocouple.

Thermostatic control (130 °C - 350 °C).

Double side door.

Oven burner: 7,650 kcal/h. (8.9 kW).

Total power: 49,650 Kcal/h. (57.7 kW).

Dimensions: 1050 x 775 x 850 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power		57,73
	KW	
LPG	Kcal/h	49.647,80
	Consumption (kg/h)	4,30
Natural gas	Pressure (g/cm2)	37,00
	Consumption (m3/h)	5,50
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
GAS	1.010	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CGB7-61 RH

1120130723

DIMENSIONS

		Article	Packed
Length	mm	1.050,00	1.090,00
Depth	mm	775,00	860,00
Height	mm	850,00	1.040,00
Weight	Kg	155,00	196,50
Volume	m3	0,69	0,97

ELECTRICITY

0,00

PLUMBING - WATER

GAS RANGE, CGB7-61 RH

Model with castors.

Made of stainless steel.

Open hobs with safety valve and thermocouples.

Pilots for ignition.

Cast iron gratings and burners.

Burners: 6 x 7,000 kcal/h

Dimensions of the grill: 347x310 mm.

UK style oven made of stainless steel, with temperature gradient from top to bottom of oven.

Pilot and thermocouple.

Thermostatic control (130 °C - 350 °C).

Double side door.

Oven burner: 7,650 kcal/h. (8.9 kW).

Total power: 49,650 Kcal/h. (57.7 kW).

Dimensions: 1050 x 775 x 850 mm.

GAS

Power		KW	57,70
		Kcal/h	49.622,00
LPG	Consumption (kg/h)		4,30
	Pressure (g/cm2)		37,00
Natural gas	Consumption (m3/h)		5,50
	Pressure (g/cm2)		18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	1.010	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-30 D

1120131000

DIMENSIONS

		Article	Packed
Length	mm	700,00	740,00
Depth	mm	775,00	835,00
Height	mm	290,00	515,00
Weight	Kg	61,00	75,00
Volume	m3	0,16	0,32

ELECTRICITY

0,00

GAS RANGE, CG7-30 D

Made of stainless steel.

Open hobs with safety valve and thermocouples.

Pilots for ignition. Cast iron gratings and burners.

Burners: 2 x 5,000 kcal/h

Dimensions of the grill: 347x310 mm.

One solid top on the right side of the work-top, cast iron burner.

Burner of 5,000 kcal/h.

Dimensions: 347x620 mm.

Total power: 15,000 Kcal/h. (17.4 kW).

Dimensions: 700 x 775 x 290 mm.

PLUMBING - WATER

GAS

Power	KW	17,44
	Kcal/h	14.998,40
LPG	Consumption (kg/h)	1,56
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	2,09
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	660	494	0	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-30 I

1120131100

DIMENSIONS

		Article	Packed
Length	mm	700,00	740,00
Depth	mm	775,00	835,00
Height	mm	290,00	515,00
Weight	Kg	61,00	75,00
Volume	m3	0,16	0,32

GAS RANGE, CG7-30 I

Made of stainless steel.

Open hobs with safety valve and thermocouples.

Pilots for ignition. Cast iron gratings and burners.

Burners: 2 x 5,000 kcal/h

Dimensions of the grill: 347x310 mm.

One solid top on the left side of the work-top, cast iron burner.

Burner of 5,000 kcal/h.

Dimensions: 347x620 mm.

Total power: 15,000 Kcal/h. (17.4 kW).

Dimensions: 700 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	17,44
	Kcal/h	14.998,40
LPG	Consumption (kg/h)	1,56
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	2,09
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	660	494	0	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-50

1120131200

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	1.050,00	1.200,00
Depth	mm	775,00	835,00
Height	mm	290,00	515,00
Weight	Kg	100,00	115,00
Volume	m3	0,24	0,50

ELECTRICITY

0,00

GAS RANGE, CG7-50
 Made of stainless steel.
 Open hobs with safety valve and thermocouples.
 Pilots for ignition. Cast iron gratings and burners.
 Burners: 1 x 7,000 + 3 x 5,000 kcal/h
 Dimensions of the grill: 347x310 mm.
 One solid top on the work-top, cast iron burner.
 Burner of 5,000 kcal/h.
 Dimensions: 347x620 mm.
 Total power: 27.000 Kcal/h. (31.4 kW).
 Dimensions: 1050 x 775 x 2900 mm.

PLUMBING - WATER

GAS

Power	KW	31,40
	Kcal/h	27.004,00
LPG	Consumption (kg/h)	2,10
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	2,80
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
GAS	1.010	494	0	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-31 D

1120131500

DIMENSIONS

		Article	Packed
Length	mm	700,00	740,00
Depth	mm	775,00	835,00
Height	mm	850,00	1.080,00
Weight	Kg	129,00	147,00
Volume	m3	0,46	0,67

ELECTRICITY

0,00

PLUMBING - WATER

GAS RANGE, CG7-31 D

Made of stainless steel.

Open hobs with safety valve and thermocouples.

Pilots for ignition. Cast iron gratings and burners.

Burners: 2 x 5,000 kcal/h

Dimensions of the grill: 347x310 mm.

One solid top on the right side of the work-top, cast iron burner.

Burner power: 5,000 kcal/h.

Solid top plate dimensions: 347x620 mm.

2/1 GN oven made of stainless steel with tubular burner in stainless steel.

Pilot and thermocouple.

Thermostatic control (130 °C - 350 °C).

Oven burner: 6,000 kcal/h.

Total power: 21,000 Kcal/h. (24.4 kW).

Dimensions: 700 x 775 x 850 mm.

GAS

Power	KW	24,42
	Kcal/h	21.001,20
LPG	Consumption (kg/h)	2,19
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	2,78
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	660	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-31 I

1120131600

DIMENSIONS

		Article	Packed
Length	mm	700,00	740,00
Depth	mm	775,00	835,00
Height	mm	850,00	1.080,00
Weight	Kg	129,00	147,00
Volume	m3	0,46	0,67

ELECTRICITY

0,00

PLUMBING - WATER

GAS RANGE, CG7-31 I

Made of stainless steel.

Open hobs with safety valve and thermocouples.

Pilots for ignition. Cast iron gratings and burners.

Burners: 2 x 5,000 kcal/h

Dimensions of the grill: 347x310 mm.

One solid top on the left side of the work-top, cast iron burner.

Burner power: 5,000 kcal/h.

Solid top plate dimensions: 347x620 mm.

2/1 GN oven made of stainless steel with tubular burner in stainless steel.

Pilot and thermocouple.

Thermostatic control (130 °C - 350 °C).

Oven burner: 6,000 kcal/h.

Total power: 21,000 Kcal/h. (24.4 kW).

Dimensions: 700 x 775 x 850 mm.

GAS

Power	KW	24,42
	Kcal/h	21.001,20
LPG	Consumption (kg/h)	2,19
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	2,78
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	660	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-51

1120131700

DIMENSIONS

		Article	Packed
Length	mm	1.050,00	860,00
Depth	mm	775,00	1.090,00
Height	mm	850,00	1.040,00
Weight	Kg	160,00	202,00
Volume	m3	0,69	0,97

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power		KW	38,37
		Kcal/h	32.998,20
LPG	Consumption (kg/h)		3,10
	Pressure (g/cm2)		37,00
Natural gas	Consumption (m3/h)		3,93
	Pressure (g/cm2)		18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	1.010	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-10

1120132000

DIMENSIONS

		Article	Packed
Length	mm	700,00	745,00
Depth	mm	775,00	835,00
Height	mm	290,00	525,00
Weight	Kg	90,00	109,00
Volume	m3	0,16	0,33

GAS RANGE, CG7-10

Made of stainless steel.

Consists of: solid top on the work-top, cast iron burner with firebrick protection ensuring even heat distribution.

Dimensions of the solid top plate: 695 x 620 mm.

Total power: 7,750 Kcal/h. (9.3 kW).

Dimensions: 700 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	9,30
	Kcal/h	7.998,00
LPG	Consumption (kg/h)	0,70
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	0,89
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	660	494	0	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS RANGE, CG7-11

1120132100

DIMENSIONS

		Article	Packed	
Length	mm	700,00	740,00	GAS RANGE, CG7-11
Depth	mm	775,00	840,00	Made of stainless steel.
Height	mm	850,00	1.055,00	Consists of: solid top on the work-top, cast iron burner.
Weight	Kg	165,00	185,50	Burner of 7,750 kcal/h.
Volume	m3	0,46	0,66	Dimensions of the solid top plate: 695 x 620 mm.

ELECTRICITY

0,00

Pilot and thermocouple.
Thermostatic control (130 °C - 350 °C).
Oven burner: 6,000 kcal/h.
Total power: 14.000 Kcal/h. (16.28 kW).
Dimensions: 700 x 775 x 850 mm.

PLUMBING - WATER

GAS

Power	KW	16,28
	Kcal/h	14.000,80
LPG	Consumption (kg/h)	1,24
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	1,58
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
GAS	660	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

ELECTRIC RANGE, CE7-20

1120134000

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	ELECTRIC RANGE, CE7-20
Length	mm	350,00	390,00	Made of stainless steel.
Depth	mm	775,00	840,00	Cast iron hot- plates with shielded elements.
Height	mm	290,00	530,00	6 settings switch. Indicator lights.
Weight	Kg	35,00	43,00	Plates: 2 x 2600 W (Ø 220 mm).
Volume	m3	0,08	0,17	Total power: 5.2 kW.
				Dimensions: 350 x 775 x 290 mm.

ELECTRICITY

<u>Electric power</u>	KW	
230V -1+N		2x4+T - 32 A
230V - III		3x2,5+T - 25 A
400V - III+N		4x1,5+T - 16 A

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	321	335	0		Prever Interruptor diferencial





700 Series

Ranges 700

ELECTRIC RANGE, CE7-40

1120134100

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	700,00	740,00
Depth	mm	775,00	845,00
Height	mm	290,00	515,00
Weight	Kg	63,00	75,00
Volume	m3	0,16	0,32

ELECTRIC RANGE, CE7-40

Made of stainless steel.

Cast iron hot- plates with shielded elements.

6 settings switch. Indicator lights.

Plates: 3 x 2.600 W (Ø 220 mm) + 1 x 1.500 W (Ø 150 mm).

Total power: 9.3 kW.

Dimensions: 700 x 775 x 290 mm.

ELECTRICITY

<u>Electric power</u>	KW	
230V -1+N		2x10+T - 50 A
230V - III		3x4+T - 40 A
400V - III+N		4x2,5+T - 32 A

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	671	335	0		Prever Interruptor diferencial





700 Series

Ranges 700

ELECTRIC RANGE, CE7-41

1120134300

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	700,00	745,00
Depth	mm	775,00	835,00
Height	mm	850,00	1.060,00
Weight	Kg	130,00	152,00
Volume	m3	0,46	0,66

ELECTRIC RANGE, CE7-41

Made of stainless steel.

Cast iron hot- plates with shielded elements.

6 settings switch. Indicator lights.

Plates: 3 x 2.600 W (Ø 220 mm) + 1 x 1.500 W (Ø 150 mm).

2/1 GN oven made of stainless steel, with upper and lower heating elements (3 + 3 KW).

Selector switch for the elements.

Thermostatic control (130 °C – 350 °C).

Oven power: 6 kW.

Total power : 15.3 kW.

Dimensions: 700 x 775 x 850 mm.

ELECTRICITY

<u>Electric power</u>		KW	
230V -1+N			2x16+T - 80 A
230V - III			3x10+T - 63 A
400V - III+N			4x4+T - 40 A

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	32	515	150		Prever Interruptor diferencial





700 Series

Ranges 700

GAS AND ELECTRIC RANGE, CGE7-41

1120138000

DIMENSIONS

		Article	Packed
Length	mm	700,00	745,00
Depth	mm	775,00	835,00
Height	mm	850,00	1.060,00
Weight	Kg	134,00	152,00
Volume	m3	0,46	0,66

ELECTRICITY

Electric power		KW	
230V -I+N			2x4+T - 32 A
230V - III			3x2,5+T - 20 A
400V - III+N			4x1,5+T - 16 A

GAS AND ELECTRIC RANGE, CGE7-41

Made of stainless steel.

Open hobs with safety valve and thermocouples.

Pilots for ignition. Cast iron gratings and burners.

Burners: 1 x 7,000 + 3 x 5,000 kcal/h

Dimensions of the grill: 347x310 mm.

2/1 GN oven made of stainless steel, with upper and lower heating elements.

Selector switch for the elements.

Thermostatic control (130 °C – 350 °C).

Oven power: 6 kW.

Total gas power: 22.000 kcal/h. (25.5 kW)

Total electrical power: 6 kW.

Dimensions: 700 x 775 x 850 mm.

PLUMBING - WATER

GAS

Power		KW	25,58
		Kcal/h	21.998,80
LPG	Consumption (kg/h)		1,56
	Pressure (g/cm2)		37,00
Natural gas	Consumption (m3/h)		2,09
	Pressure (g/cm2)		18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	32	515	150		Prever Interruptor diferencial
GAS	660	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Ranges 700

GAS AND ELECTRIC RANGE, CGE7-41 H

1120138012

DIMENSIONS

		Article	Packed
Length	mm	700,00	745,00
Depth	mm	775,00	835,00
Height	mm	850,00	1.060,00
Weight	Kg	134,00	152,00
Volume	m3	0,46	0,66

ELECTRICITY

Electric power		KW	
230V -I+N			2x4+T - 32 A
230V - III			3x2,5+T - 20 A
400V - III+N			4x1,5+T - 16 A

GAS AND ELECTRIC RANGE, CGE7-41 H

Made of stainless steel.

Open hobs with safety valve and thermocouples.

Pilots for ignition. Cast iron gratings and burners.

Burners: 4 x 7,000 kcal/h

Dimensions of the grill: 347x310 mm.

2/1 GN oven made of stainless steel, with upper and lower heating elements (3 + 3 KW).

Selector switch for the elements.

Thermostatic control (130 °C – 350 °C).

Oven power: 6 kW.

Total gas power: 28,000 kcal/h. (32.5 kW)

Total electrical power: 6 kW.

Dimensions: 700 x 775 x 850 mm.

PLUMBING - WATER

GAS

Power		KW	32,56
		Kcal/h	28.001,60
LPG	Consumption (kg/h)		3,00
	Pressure (g/cm2)		37,00
Natural gas	Consumption (m3/h)		3,85
	Pressure (g/cm2)		18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR330

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	32	515	150		Prever Interruptor diferencial
GAS	660	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fry-tops 700

GAS FRY-TOP, FTG7-05 L

1120230000

DIMENSIONS

		Article	Packed	GAS FRY-TOP, FTG7-05 L
Length	mm	350,00	390,00	Made of stainless steel.
Depth	mm	775,00	835,00	Smooth hot-plate. Surface area: 21 dm ² .
Height	mm	290,00	585,00	Burner in stainless steel with pilot.
Weight	Kg	43,00	55,00	Thermostat control of the hot-plate temperature 120 C° -310 C°.
Volume	m3	0,08	0,19	Fat collector under the grill.
				Power: 6000 Kcal/h. (6.98 kW).
				Dimensions: 350 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	6,99
	Kcal/h	6.011,40
LPG	Consumption (kg/h)	0,52
	Pressure (g/cm ²)	37,00
Natural gas	Consumption (m ³ /h)	0,66
	Pressure (g/cm ²)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR307

Connections	X	Y	Z	Diameter	Information
GAS	310	494	57	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fry-tops 700

GAS FRY-TOP, FTG7-05 R

1120230003

DIMENSIONS

		Article	Packed	GAS FRY-TOP, FTG7-05 R
Length	mm	350,00	390,00	Made of stainless steel.
Depth	mm	775,00	835,00	Ribbed hot-plate. Surface area: 21 dm ² .
Height	mm	290,00	585,00	Burner in stainless steel with pilot.
Weight	Kg	43,00	55,00	Thermostat control of the hot-plate temperature 120 C° -310 C°.
Volume	m3	0,08	0,19	Fat collector under the grill.
				Power: 6000 Kcal/h. (6.98 kW).
				Dimensions: 350 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	6,99
	Kcal/h	6.011,40
LPG	Consumption (kg/h)	0,52
	Pressure (g/cm ²)	37,00
Natural gas	Consumption (m ³ /h)	0,66
	Pressure (g/cm ²)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR307

Connections	X	Y	Z	Diameter	Information
GAS	310	494	57	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fry-tops 700

GAS FRY-TOP, FTG/C7-05

1120230070

DIMENSIONS

		Article	Packed
Length	mm	350,00	390,00
Depth	mm	775,00	835,00
Height	mm	290,00	585,00
Weight	Kg	43,00	55,00
Volume	m3	0,08	0,19

GAS FRY-TOP, FTG/C7-05

Made of stainless steel.

Smooth hot-plate. Surface area: 21 dm².

50 microns thickness chromium coated steel sheeting hot-plate.

Burner in stainless steel with pilot.

Thermostat control of the hot-plate temperature 120 C° -310 C°.

Fat collector under the grill.

Power: 6000 Kcal/h. (6.98 kW).

Dimensions: 350 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	6,99
	Kcal/h	6.011,40
LPG	Consumption (kg/h)	0,52
	Pressure (g/cm ²)	37,00
Natural gas	Consumption (m ³ /h)	0,66
	Pressure (g/cm ²)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR307

Connections	X	Y	Z	Diameter	Information
GAS	310	494	57	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fry-tops 700

GAS FRY-TOP, FTG7-05 VL

1120230100

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	
Length	mm	350,00	390,00	GAS FRY-TOP, FTG7-05 VL
Depth	mm	775,00	835,00	Made of stainless steel.
Height	mm	290,00	585,00	Smooth hot-plate. Surface area: 21 dm ² .
Weight	Kg	43,00	55,00	Burner in stainless steel with pilot.
Volume	m ³	0,08	0,19	Safety valve and thermocouple.
				Fat collector under the grill.
				Power: 6000 Kcal/h. (6.98 kW).
				Dimensions: 350 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	6,99
	Kcal/h	6.011,40
LPG	Consumption (kg/h)	0,52
	Pressure (g/cm ²)	37,00
Natural gas	Consumption (m ³ /h)	0,66
	Pressure (g/cm ²)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR307

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
GAS	310	494	57	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fry-tops 700

GAS FRY-TOP, FTG7-05 VR

1120230103

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	
Length	mm	350,00	390,00	GAS FRY-TOP, FTG7-05 VR
Depth	mm	775,00	835,00	Made of stainless steel.
Height	mm	290,00	585,00	Ribbed hot-plate. Surface area: 21 dm ² .
Weight	Kg	43,00	55,00	Burner in stainless steel with pilot.
Volume	m ³	0,08	0,19	Safety valve and thermocouple.
				Fat collector under the grill.
				Power: 6000 Kcal/h. (6.98 kW).
				Dimensions: 350 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	6,99
	Kcal/h	6.011,40
LPG	Consumption (kg/h)	0,52
	Pressure (g/cm ²)	37,00
Natural gas	Consumption (m ³ /h)	0,66
	Pressure (g/cm ²)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR307

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
GAS	310	494	57	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fry-tops 700

GAS FRY-TOP, FTG7-10 L

1120230500

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	GAS FRY-TOP, FTG7-10 L
Length	mm	700,00	740,00	Made of stainless steel.
Depth	mm	775,00	840,00	Smooth hot-plate. Surface area: 43 dm ² .
Height	mm	290,00	590,00	Burners in stainless steel with pilot.
Weight	Kg	72,00	85,00	Thermostat control of the hot-plate temperature 120 C° -310 C°.
Volume	m ³	0,16	0,37	Fat collector under the grill.
				Power: 12000 Kcal/h. (13.96 kW).
				Dimensions: 700 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	13,96
	Kcal/h	12.005,60
LPG	Consumption (kg/h)	1,05
	Pressure (g/cm ²)	37,00
Natural gas	Consumption (m ³ /h)	1,33
	Pressure (g/cm ²)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR307

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
GAS	660	494	57	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fry-tops 700

GAS FRY-TOP, FTG7-10 R

1120230503

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	<u>GAS FRY-TOP, FTG7-10 R</u>
Length	mm	700,00	740,00	Made of stainless steel.
Depth	mm	775,00	840,00	Ribbed hot-plate. Surface area: 43 dm ² .
Height	mm	290,00	590,00	Burners in stainless steel with pilot.
Weight	Kg	72,00	85,00	Thermostat control of the hot-plate temperature 120 C° -310 C°.
Volume	m ³	0,16	0,37	Fat collector under the grill.
				Power: 12000 Kcal/h. (13.96 kW).
				Dimensions: 700 x 775 x 290 mm.
<u>ELECTRICITY</u>				
			0,00	

PLUMBING - WATER

<u>GAS</u>		
Power	KW	13,96
	Kcal/h	12.005,60
LPG	Consumption (kg/h)	1,05
	Pressure (g/cm ²)	37,00
Natural gas	Consumption (m ³ /h)	1,33
	Pressure (g/cm ²)	18,00

VAPOR


Not used

AIRE Comprimido

Not used

Certification EQNET- CE **99AR307**

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
GAS	660	494	57	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fry-tops 700

GAS FRY-TOP, FTG7-10 L+R

1120230506

DIMENSIONS

		Article	Packed	GAS FRY-TOP, FTG7-10 L+R
Length	mm	700,00	740,00	Made of stainless steel.
Depth	mm	775,00	840,00	½ smooth – ½ ribbed hot-plate. Surface area: 43 dm ² .
Height	mm	290,00	590,00	Burners in stainless steel with pilot.
Weight	Kg	72,00	85,00	Thermostat control of the hot-plate temperature 120 C° -310 C°.
Volume	m ³	0,16	0,37	Fat collector under the grill.
				Power: 12000 Kcal/h. (13.96 kW).
				Dimensions: 700 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power		KW	13,96
		Kcal/h	12.005,60
LPG		Consumption (kg/h)	1,05
		Pressure (g/cm ²)	37,00
Natural gas		Consumption (m ³ /h)	1,33
		Pressure (g/cm ²)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR307

Connections	X	Y	Z	Diameter	Information
GAS	660	494	57	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fry-tops 700

GAS FRY-TOP, FTG/C7-10

1120230570

DIMENSIONS

		Article	Packed
Length	mm	700,00	740,00
Depth	mm	775,00	840,00
Height	mm	290,00	590,00
Weight	Kg	72,00	85,00
Volume	m3	0,16	0,37

GAS FRY-TOP, FTG/C7-10

Made of stainless steel.

Smooth hot-plate. Surface area: 43 dm².

50 microns thickness chromium coated steel sheeting hot-plate.

Burners in stainless steel with pilot.

Thermostat control of the hot-plate temperature 120 C° -310 C°.

Fat collector under the grill.

Power: 12000 Kcal/h. (13.96 kW).

Dimensions: 700 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	13,96
	Kcal/h	12.005,60
LPG	Consumption (kg/h)	1,05
	Pressure (g/cm ²)	37,00
Natural gas	Consumption (m ³ /h)	1,33
	Pressure (g/cm ²)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR307

Connections	X	Y	Z	Diameter	Information
GAS	660	494	57	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fry-tops 700

GAS FRY-TOP, FTG7-10 VL

1120230600

DIMENSIONS

		Article	Packed	GAS FRY-TOP, FTG7-10 VL
Length	mm	700,00	740,00	Made of stainless steel.
Depth	mm	775,00	840,00	Smooth hot-plate. Surface area: 43 dm ² .
Height	mm	290,00	590,00	Burners in stainless steel with pilot.
Weight	Kg	72,00	85,00	Safety valves and thermocouples.
Volume	m ³	0,16	0,37	Fat collector under the grill.
				Power: 12000 Kcal/h. (13.96 kW).
				Dimensions: 700 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	13,96
	Kcal/h	12.005,60
LPG	Consumption (kg/h)	1,05
	Pressure (g/cm ²)	37,00
Natural gas	Consumption (m ³ /h)	1,33
	Pressure (g/cm ²)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR307

Connections	X	Y	Z	Diameter	Information
GAS	660	494	57	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fry-tops 700

GAS FRY-TOP, FTG7-10 VR

1120230603

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	GAS FRY-TOP, FTG7-10 VR
Length	mm	700,00	740,00	Made of stainless steel.
Depth	mm	775,00	840,00	Ribbed hot-plate. Surface area: 43 dm ² .
Height	mm	290,00	590,00	Burners in stainless steel with pilot.
Weight	Kg	72,00	85,00	Safety valves and thermocouples.
Volume	m ³	0,16	0,37	Fat collector under the grill.
				Power: 12000 Kcal/h. (13.96 kW).
				Dimensions: 700 x 775 x 290 mm.
<u>ELECTRICITY</u>				
			0,00	

PLUMBING - WATER

<u>GAS</u>		
Power	KW	13,96
	Kcal/h	12.005,60
LPG	Consumption (kg/h)	1,05
	Pressure (g/cm ²)	37,00
Natural gas	Consumption (m ³ /h)	1,33
	Pressure (g/cm ²)	18,00

VAPOR


Not used

AIRE Comprimido

Not used

Certification EQNET- CE **99AR307**

Connections	X	Y	Z	Diameter	Information
GAS	660	494	57	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fry-tops 700

GAS FRY-TOP, FTG7-10 V L+R

1120230606

DIMENSIONS

		Article	Packed	GAS FRY-TOP, FTG7-10 V L+R
Length	mm	700,00	740,00	Made of stainless steel.
Depth	mm	775,00	840,00	2/3 smooth + 1/3 ribbed hot-plate. Surface area: 43 dm ² .
Height	mm	290,00	590,00	Burners in stainless steel with pilot.
Weight	Kg	72,00	85,00	Safety valves and thermocouples.
Volume	m ³	0,16	0,37	Fat collector under the grill.
				Power: 12000 Kcal/h. (13.96 kW).
				Dimensions: 700 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	13,96
	Kcal/h	12.005,60
LPG	Consumption (kg/h)	1,05
	Pressure (g/cm ²)	37,00
Natural gas	Consumption (m ³ /h)	1,33
	Pressure (g/cm ²)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR307

Connections	X	Y	Z	Diameter	Information
GAS	660	494	57	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fry-tops 700

ELECTRIC FRY-TOP, FTE7-05 L

1120234000

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	350,00	390,00
Depth	mm	775,00	835,00
Height	mm	290,00	585,00
Weight	Kg	43,00	55,00
Volume	m3	0,08	0,19

ELECTRIC FRY-TOP, FTE7-05 L

Made of stainless steel.

Smooth hot-plate. Surface area: 21 dm2.

Shielded elements in stainless steel for heating.

Thermostat control of the hot-plate temperature 120 C° -310 C°.

Fat collector under the grill.

Power: 4.5 kW.

Dimensions: 350 x 775 x 290 mm.

ELECTRICITY

<u>Electric power</u>	KW	
230V -1+N		2x2,5+T - 25 A
230V - III		3x1,5+T - 16 A
400V - III+N		4x1,5+T - 10 A

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	250	200	0		Prever Interruptor diferencial





700 Series

Fry-tops 700

ELECTRIC FRY-TOP, FTE7-05 R

1120234003

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	350,00	390,00
Depth	mm	775,00	835,00
Height	mm	290,00	585,00
Weight	Kg	43,00	55,00
Volume	m3	0,08	0,19

ELECTRIC FRY-TOP, FTE7-05 R

Made of stainless steel.

Ribbed hot-plate. Surface area: 21 dm².

Shielded elements in stainless steel for heating.

Thermostat control of the hot-plate temperature 120 C° -310 C°.

Fat collector under the grill.

Power: 4.5 kW.

Dimensions: 350 x 775 x 290 mm.

ELECTRICITY

<u>Electric power</u>	KW	
230V -1+N		2x2,5+T - 25 A
230V - III		3x1,5+T - 16 A
400V - III+N		4x1,5+T - 10 A

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	250	200	0		Prever Interruptor diferencial





700 Series

Fry-tops 700

ELECTRIC FRY-TOP, FTE/C7-05

1120234070

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	350,00	390,00
Depth	mm	775,00	835,00
Height	mm	290,00	585,00
Weight	Kg	43,00	55,00
Volume	m3	0,08	0,19

ELECTRIC FRY-TOP, FTE/C7-05

Made of stainless steel.

Smooth hot-plate. Surface area: 21 dm².

50 microns thickness chromium coated steel sheeting hot-plate.

Shielded elements in stainless steel for heating.

Thermostat control of the hot-plate temperature 120 C° -310 C°.

Fat collector under the grill.

Power: 4.5 kW.

Dimensions: 350 x 775 x 290 mm.

ELECTRICITY

<u>Electric power</u>	KW	
230V -1+N		2x2,5+T - 25 A
230V - III		3x1,5+T - 16 A
400V - III+N		4x1,5+T - 10 A

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	250	200	0		Prever Interruptor diferencial





700 Series

Fry-tops 700

ELECTRIC FRY-TOP, FTE7-10 L

1120234500

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	700,00	740,00
Depth	mm	775,00	840,00
Height	mm	290,00	590,00
Weight	Kg	70,00	81,00
Volume	m3	0,16	0,37

ELECTRIC FRY-TOP, FTE7-10 L

Made of stainless steel.

Smooth hot-plate. Surface area: 43 dm².

Shielded elements in stainless steel for heating.

Thermostat control of the hot-plate temperature 120 C° -310 C°.

Fat collector under the grill.

Power: 9 kW.

Dimensions: 700 x 775 x 290 mm.

ELECTRICITY

<u>Electric power</u>	KW	
230V -1+N		2x10+T - 50 A
230V - III		3x4+T - 32 A
400V - III+N		4x1,5+T - 16 A

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	600	200	0		Prever Interruptor diferencial





700 Series

Fry-tops 700

ELECTRIC FRY-TOP, FTE7-10 R

1120234503

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	700,00	740,00
Depth	mm	775,00	840,00
Height	mm	290,00	590,00
Weight	Kg	70,00	81,00
Volume	m3	0,16	0,37

ELECTRIC FRY-TOP, FTE7-10 R

Made of stainless steel.

Ribbed hot-plate. Surface area: 43 dm².

Shielded elements in stainless steel for heating.

Thermostat control of the hot-plate temperature 120 C° -310 C°.

Fat collector under the grill.

Power: 9 kW.

Dimensions: 700 x 775 x 290 mm.

ELECTRICITY

<u>Electric power</u>	KW	
230V -1+N		2x10+T - 50 A
230V - III		3x4+T - 32 A
400V - III+N		4x1,5+T - 16 A

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	600	200	0		Prever Interruptor diferencial





700 Series

Fry-tops 700

ELECTRIC FRY-TOP, FTE7-10 L+R

1120234506

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	700,00	740,00
Depth	mm	775,00	840,00
Height	mm	290,00	590,00
Weight	Kg	70,00	81,00
Volume	m3	0,16	0,37

ELECTRIC FRY-TOP, FTE7-10 L+R

Made of stainless steel.

½ smooth – ½ ribbed hot-plate. Surface area: 43 dm².

Shielded elements in stainless steel for heating.

Thermostat control of the hot-plate temperature 120 C° -310 C°.

Fat collector under the grill.

Power: 9 kW.

Dimensions: 700 x 775 x 290 mm.

ELECTRICITY

<u>Electric power</u>	KW	
230V -1+N		2x10+T - 50 A
230V - III		3x4+T - 32 A
400V - III+N		4x1,5+T - 16 A

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	600	200	0		Prever Interruptor diferencial





700 Series

Fry-tops 700

ELECTRIC FRY-TOP, FTE/C7-10

1120234570

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	700,00	740,00
Depth	mm	775,00	840,00
Height	mm	290,00	590,00
Weight	Kg	70,00	81,00
Volume	m3	0,16	0,37

ELECTRIC FRY-TOP, FTE/C7-10

Made of stainless steel.

Smooth hot-plate. Surface area: 43 dm2.

50 microns thickness chromium coated steel sheeting hot-plate.

Shielded elements in stainless steel for heating.

Thermostat control of the hot-plate temperature 120 C° -310 C°.

Fat collector under the grill.

Power: 9 kW.

Dimensions: 700 x 775 x 290 mm.

ELECTRICITY

<u>Electric power</u>	KW	
230V -1+N		2x10+T - 50 A
230V - III		3x4+T - 32 A
400V - III+N		4x1,5+T - 16 A

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	600	200	0		Prever Interruptor diferencial





700 Series

Boiling pans 700

GAS BOILING PAN, MG7-10

1120530000

DIMENSIONS

		Article	Packed
Length	mm	700,00	740,00
Depth	mm	775,00	915,00
Height	mm	850,00	1.150,00
Weight	Kg	94,00	120,00
Volume	m3	0,46	0,78

GAS BOILING PAN, MG7-10

Made of stainless steel.

Capacity: 80 litres.

Counterweighted folding lid.

Stainless steel burner, with safety valve and thermocouple.

Piezoelectric ignition.

Cold and hot water filling tap.

Drainage tap.

Power: 15000 Kcal/h. (17.44 kW).

Electrical connection 230 V - 1+N+T.

Dimensions: 700 x 775 x 850 mm.

ELECTRICITY

Electric power		KW	0,05
230V -1+N			2x2,5 - 4A
230V - III			
400V - III+N			

PLUMBING - WATER

GAS

Power		KW	17,44
		Kcal/h	14.998,40
LPG	Consumption (kg/h)		1,42
	Pressure (g/cm2)		37,00
Natural gas	Consumption (m3/h)		1,80
	Pressure (g/cm2)		18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR282

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	600	650	150		
HOT WATER	468	700	105	3/4"	Prever llave de corte en la toma
COLD WATER	528	700	105	3/4"	Prever llave de corte en la toma
GAS	662	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Boiling pans 700

GAS BOILING PAN, MG7-10-BM

1120530500

DIMENSIONS

		Article	Packed
Length	mm	700,00	740,00
Depth	mm	775,00	915,00
Height	mm	850,00	1.150,00
Weight	Kg	94,00	120,00
Volume	m3	0,46	0,78

ELECTRICITY

Electric power		KW	
230V -1+N			0,05
230V - III			2x2,5 - 4A
400V - III+N			

PLUMBING - WATER

GAS BOILING PAN, MG7-10-BM
 Made of stainless steel.
 Capacity: 80 litres. Double jacket pan (bain-marie system).
 Counterweighted folding lid.
 Stainless steel burner, with safety valve and thermocouple.
 Piezoelectric ignition.
 Safety device for the bain-marie extinguishes the burner in the event of low water level.
 Cold and hot water filling tap.
 Drainage tap.
 Filling tap and control tap for the level of the double jacket pan (bain-marie).
 Over-pressure safety valve.
 Power: 15000 Kcal/h. (17.44 kW).
 Electrical connection 230 V - 1+N+T.
 Dimensions: 700 x 775 x 850 mm.

GAS

Power		KW	17,44
		Kcal/h	14.998,40
LPG	Consumption (kg/h)		1,42
	Pressure (g/cm2)		37,00
Natural gas	Consumption (m3/h)		1,80
	Pressure (g/cm2)		18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR282

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	600	650	150		
COLD WATER	528	700	105	3/4"	Prever llave de corte en la toma
HOT WATER	468	700	105	3/4"	Prever llave de corte en la toma
GAS	662	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Boiling pans 700

ELECTRIC BOILING PAN, ME7-10-BM

1120534000

DIMENSIONS

		Article	Packed
Length	mm	700,00	740,00
Depth	mm	775,00	915,00
Height	mm	850,00	1.150,00
Weight	Kg	94,00	120,00
Volume	m3	0,46	0,78

ELECTRICITY

Electric power	KW	
230V -I+N		2x10+T - 50 A
230V - III		3x4+T - 32 A
400V - III+N		4x1,5+T - 16 A

ELECTRIC BOILING PAN, ME7-10-BM

Made of stainless steel.

Capacity: 80 litres. Double jacket pan (bain-marie system).

Counterweighted folding lid.

Shielded heating elements in stainless steel.

Pilot light for heating. Control by thermostat.

Cold and hot water filling tap.

Drainage tap.

Filling tap and control tap for the level of the double jacket pan (bain-marie).

Over-pressure safety vale.

Power: 9 kW.

Dimensions: 700 x 775 x 850 mm.

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	105	690	150		Prever Interruptor diferencial
HOT WATER	470	700	135	3/4"	Prever llave de corte en la toma
COLD WATER	540	700	135	3/4"	Prever llave de corte en la toma





700 Series

Boiling pans 700

STEAM OPERATED BOILING PAN, MV7-10 BM

1120537000

DIMENSIONS

		Article	Packed
Length	mm	700,00	745,00
Depth	mm	775,00	910,00
Height	mm	850,00	1.120,00
Weight	Kg	80,00	90,00
Volume	m3	0,46	0,76

ELECTRICITY

0,00
2x2,5 - 4A

STEAM OPERATED BOILING PAN, MV7-10 BM

Made of stainless steel.

Capacity: 80 litres.

Double jacket pan (bain-marie system).

Counterweighted folding lid.

Pressure of inlet steam: 0,4 - 0,5 bar.

1 " control knob for inlet steam in the bain marie system.

Steam circulates inside the bain marie jacket pan.

Outlet pipe for the condensed steam in the bottom of the pan.

Water filling tap.

Drainage tap.

Over-pressure safety valve and manometer.

Electrical connection 230 V - 1+N+T.

Dimensions: 700 x 775 x 850 mm.

PLUMBING - WATER

GAS

Not used


VAPOR

Consumption	kg/h	25,00
Pressure	bar	0,3-0,4

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	105	690	150		
DRAIN	425	800	105	1/2"	
COLD WATER	655	842	105	3/4"	Prever llave de corte en la toma
STEAM Inlet	805	635	105	1"	P=0,4-0,5 bar





700 Series

Pasta cookers 700

GAS PASTA COOKER, CPG7-05 NC

1120630000

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	
Length	mm	350,00	390,00	GAS PASTA COOKER, CPG7-05 NC
Depth	mm	775,00	835,00	Made of stainless steel.
Height	mm	850,00	1.070,00	Cast iron burners.
Weight	Kg	60,00	76,00	Thermostat temperature control.
Volume	m3	0,23	0,35	Water filling tap. Drainage tap.
				Capacity: 20 liters.
				Power: 12,000 kcal/h. (13.95 kW).
				Dimensions: 350 x 775 x 850 mm.
				Baskets non included.
<u>ELECTRICITY</u>			0,00	

PLUMBING - WATER

<u>GAS</u>		
Power	KW	13,95
	Kcal/h	11.997,00
LPG	Consumption (kg/h)	1,04
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	1,32
	Pressure (g/cm2)	18,00


VAPOR

Not used

AIRE Comprimido

Not used

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
COLD WATER	45	448	115	1/2"	Prever llave de corte en la toma
DRAIN	274	542	115	30x25	
GAS	305	482	115	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Pasta cookers 700

GAS PASTA COOKER, CPG7-05

1120630003

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	
Length	mm	350,00	390,00	GAS PASTA COOKER, CPG7-05
Depth	mm	775,00	835,00	Made of stainless steel.
Height	mm	850,00	1.070,00	Cast iron burners.
Weight	Kg	60,00	76,00	Thermostat temperature control.
Volume	m3	0,23	0,35	Water filling tap. Drainage tap.
				Capacity: 20 liters.
				Power: 12,000 kcal/h. (13.95 kW).
				Dimensions: 350 x 775 x 850 mm.
				Equipment: 2 baskets size 1/2.
<u>ELECTRICITY</u>			0,00	

PLUMBING - WATER

<u>GAS</u>		
Power	KW	13,95
	Kcal/h	11.997,00
LPG	Consumption (kg/h)	1,04
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	1,32
	Pressure (g/cm2)	18,00


VAPOR

Not used

AIRE Comprimido

Not used

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
COLD WATER	45	448	115	1/2"	Prever llave de corte en la toma
DRAIN	274	542	115	30x25	
GAS	305	482	115	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Pasta cookers 700

ELECTRIC PASTA COOKER, CPE7-05 NC

1120634003

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	ELECTRIC PASTA COOKER, CPE7-05 NC
Length	mm	350,00	1.150,00	Made of stainless steel.
Depth	mm	775,00	400,00	Heater elements in stainless steel.
Height	mm	850,00	840,00	Thermostat temperature control.
Weight	Kg	60,00	76,00	Water filling tap. Drainage tap.
Volume	m3	0,23	0,39	Capacity: 30 liters.
				Power: 8 KW.
				Dimensions: 350 x 775 x 850 mm.

ELECTRICITY

<u>Electric power</u>			
230V -1+N	KW		8,00
230V - III			
400V - III+N		3x4+N+T	

Baskets non included.

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	320	600	600		
COLD WATER	45	448	115	1/2"	Prever llave de corte en la toma
DRAIN	274	542	115	30x25	





700 Series

Pasta cookers 700

ELECTRIC PASTA COOKER, CPE7-05

1120634007

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	ELECTRIC PASTA COOKER, CPE7-05
Length	mm	350,00	1.150,00	Made of stainless steel.
Depth	mm	775,00	400,00	Heater elements in stainless steel.
Height	mm	850,00	840,00	Thermostat temperature control.
Weight	Kg	60,00	76,00	Water filling tap. Drainage tap.
Volume	m3	0,23	0,39	Capacity: 30 liters.
				Power: 8 KW.
				Dimensions: 350 x 775 x 850 mm.

ELECTRICITY

<u>Electric power</u>				Equipment: 2 baskets size 1/2.
230V -1+N			8,00	
230V - III				
400V - III+N			3x4+N+T	

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	320	600	600		
COLD WATER	45	448	115	1/2"	Prever llave de corte en la toma
DRAIN	274	542	115	30x25	





700 Series

Fryers 700

GAS FRYER, FG7-05

1120830000

DIMENSIONS

		Article	Packed
Length	mm	350,00	390,00
Depth	mm	775,00	835,00
Height	mm	850,00	1.060,00
Weight	Kg	57,00	68,00
Volume	m3	0,23	0,35

ELECTRICITY

Electric power	KW	
230V -1+N		2x1,5+T - 2 A
230V - III		
400V - III+N		

GAS FRYER, FG7-05
 Made of stainless steel
 Capacity: one 15 litre oil/well.
 Tank equipment: 1 basket 250x280 or 2 small baskets 250x135 mm .
 Cast iron burners.
 Thermostat temperature control 60 °C to 195 °C.
 Automatic burner ignition by means of an electromagnetic valve, with pilot light and thermocouple.
 Safety thermostat.
 Drainage tap.
 Power: 13000 Kcal/h. (15.11 kW).
 Electrical connection 230 V - 1+N+T.
 Dimensions: 350 x 775 x 850 mm.

PLUMBING - WATER

GAS

Power	KW	15,11
	Kcal/h	12.994,60
LPG	Consumption (kg/h)	1,25
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	1,59
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR284

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	286	540	150		Prever Interruptor diferencial
GAS	312	492	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fryers 700

GAS FRYER, FG7-10

1120830500

DIMENSIONS

		Article	Packed
Length	mm	700,00	742,00
Depth	mm	775,00	835,00
Height	mm	850,00	1.060,00
Weight	Kg	104,00	119,00
Volume	m3	0,46	0,66

ELECTRICITY

Electric power		KW	0,05
230V -1+N			2x1,5+T - 2 A
230V - III			
400V - III+N			

GAS FRYER, FG7-10

Made of stainless steel

Capacity: two 15 litre oil/well.

Tank equipment: 1 basket 250x280 or 2 small baskets 250x135 mm .

Cast iron burners.

Thermostats temperature control 60 °C to 195 °C.

Automatic burner ignition by means of an electromagnetic valve, with pilot light and thermocouple.

Safety thermostat.

Drainage taps.

Power: 26000 Kcal/h. (30.22 kW).

Electrical connection 230 V - 1+N+T.

Dimensions: 700 x 775 x 850 mm.

PLUMBING - WATER

GAS

Power		KW	30,22
		Kcal/h	25.989,20
LPG	Consumption (kg/h)		2,50
	Pressure (g/cm2)		37,00
Natural gas	Consumption (m3/h)		3,18
	Pressure (g/cm2)		18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR284

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	286	540	150		Prever Interruptor diferencial
ELECTRICITY	636	540	150		Prever Interruptor diferencial
GAS	662	492	105	R.3/4"G	Prever regulador y llave de corte individual
GAS	312	492	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Fryers 700

ELECTRIC FRYER, FE7-05

1120834000

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	350,00	390,00
Depth	mm	775,00	835,00
Height	mm	850,00	1.060,00
Weight	Kg	57,00	68,00
Volume	m3	0,23	0,35

ELECTRICITY

<u>Electric power</u>	KW	
230V -I+N		2x16+T - 80 A
230V - III		3x16+T - 40 A
400V - III+N		4x2,66+T - 25 A

PLUMBING - WATER

GAS

Not used

VAPOR

Not used

AIRE Comprimido

Not used

ELECTRIC FRYER, FE7-05

Made of stainless steel

Capacity: one 15 litre oil/well.

Tank equipment: 1 basket 250x280 or 2 small baskets 250x135 mm .

Shielded heating elements in stainless steel.

Pilot light for heating.

Control by thermostat (60 °C to 195 °C).


Safety thermostat.

Drainage tap.

Power: 13.5 kW.

Dimensions: 350 x 775 x 850 mm.

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	264	618	650		Prever Interruptor diferencial





700 Series

Fryers 700

ELECTRIC FRYER, FE7-10

1120834500

DIMENSIONS

		Article	Packed
Length	mm	700,00	742,00
Depth	mm	775,00	835,00
Height	mm	850,00	1.060,00
Weight	Kg	104,00	119,00
Volume	m3	0,46	0,66

ELECTRICITY

Electric power	KW	
230V -I+N		2x16+T - 80 A
230V - III		3x16+T - 40 A
400V - III+N		4x2,66+T - 25 A

PLUMBING - WATER

GAS

Not used

VAPOR

Not used

AIRE Comprimido

Not used

ELECTRIC FRYER, FE7-10

Made of stainless steel

Capacity: two 15 litre oil/well.

Tank equipment: 1 basket 250x280 or 2 small baskets 250x135 mm .

Shielded heating elements in stainless steel.

Pilot light for heating.

Control by thermostats (60 °C to 195 °C).


Safety thermostats.

Drainage taps.

Power: 27 kW.

Dimensions: 700 x 775 x 850 mm.

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	614	618	650		Prever Interruptor diferencial
ELECTRICITY	264	618	650		Prever Interruptor diferencial





700 Series

Tilting bratt pans 700

GAS TILTING BRATT PAN, SBG7-10 I

1121130000

DIMENSIONS

		Article	Packed
Length	mm	700,00	745,00
Depth	mm	775,00	925,00
Height	mm	850,00	1.070,00
Weight	Kg	114,00	149,00
Volume	m3	0,46	0,74

GAS TILTING BRATT PAN, SBG7-10 I

Made of stainless steel

Pan capacity: 50 litres (approx.).

Surface area: 42 dm²

Stainless steel pan, with heat diffuser bottom 10 mm. thick. Crank raising system.

Counterweighted folding lid.

Stainless steel tubular burner controlled by solenoid valve and thermostat temperature control (50 °C to 315 °C).

Water filling tap.

Power: 12000 Kcal/h. (13.96 kW).

Electrical connection 230 V - 1+N+T.

Dimensions: 700 x 775 x 850 mm.

ELECTRICITY

Electric power		KW	0,05
230V -1+N			2x2,5 - 4A
230V - III			
400V - III+N			

PLUMBING - WATER

GAS

Power		KW	13,96
		Kcal/h	12.005,60
LPG	Consumption (kg/h)		1,09
	Pressure (g/cm ²)		37,00
Natural gas	Consumption (m ³ /h)		1,38
	Pressure (g/cm ²)		18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR308

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	500	600	150		Prever Interruptor diferencial
COLD WATER	350	600	105	3/4"	Prever llave de corte en la toma
GAS	662	494	105	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Tilting bratt pans 700

ELECTRIC TILTING BRATT PAN, SBE7-10 I

1121134000

DIMENSIONS

		Article	Packed
Length	mm	700,00	745,00
Depth	mm	775,00	925,00
Height	mm	850,00	1.070,00
Weight	Kg	114,00	149,00
Volume	m3	0,46	0,74

ELECTRICITY

Electric power	KW	
230V -I+N		2x10+T - 50 A
230V - III		3x4+T - 32 A
400V - III+N		4x1,5+T - 16 A

PLUMBING - WATER

GAS

Not used

VAPOR

Not used

AIRE Comprimido

Not used

ELECTRIC TILTING BRATT PAN, SBE7-10 I

Made of stainless steel

Pan capacity: 50 litres (approx.).

Surface area: 42 dm2

Stainless steel pan, with heat diffuser bottom 10 mm. thick.

Counterweighted folding lid.

Shielded elements controlled by thermostat. Pilot lights.


Thermostat temperature control (50 °C to 315 °C).

Water filling tap.

Power: 9 kW.

Dimensions: 700 x 775 x 850 mm.

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	500	600	150		Prever Interruptor diferencial
COLD WATER	350	600	105	3/4"	Prever llave de corte en la toma





700 Series

Bain marie 700

GAS BAIN-MARIE, BMG7-10

1121230500

DIMENSIONS

		Article	Packed
Length	mm	700,00	740,00
Depth	mm	775,00	830,00
Height	mm	290,00	520,00
Weight	Kg	34,00	40,00
Volume	m3	0,16	0,32

ELECTRICITY

Electric power		KW	
230V -1+N			0,05
230V - III			2x2,5 - 4 A
400V - III+N			

GAS BAIN-MARIE, BMG7-10

Made of stainless steel.

Tank capacity: 30 litres.

The tank is designed to accommodate GN containers.

Built with separators for containers.

Piezoelectric ignition and pilot. Safety thermocouple.

Thermostat temperature control (30 °C to 90 °C)

Water intake tap.

Drainage with overflow.

Power: 5500 Kcal/h. (6.40 kW).

Electrical connection: 230 V - 1+N+E.

Dimensions: 700 x 775 x 290 mm.

PLUMBING - WATER

GAS

Power		KW	6,40
		Kcal/h	5.504,00
LPG	Consumption (kg/h)		0,54
	Pressure (g/cm2)		37,00
Natural gas	Consumption (m3/h)		0,69
	Pressure (g/cm2)		18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AR328

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	662	494			
COLD WATER	38	494	0	1/2"	Prever llave de corte en la toma
DRAIN	38	199	0	30x25	
GAS	662	494	50	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Bain marie 700

ELECTRIC BAIN-MARIE, BME7-05

1121234000

DIMENSIONS

		Article	Packed
Length	mm	350,00	380,00
Depth	mm	775,00	840,00
Height	mm	290,00	520,00
Weight	Kg	21,00	27,00
Volume	m3	0,08	0,17

ELECTRIC BAIN-MARIE, BME7-05

Made of stainless steel.

Tank capacity: 17 litres.

The tank is designed to accommodate GN containers.

Built with separators for containers.

Shielded elements controlled by thermostat. Pilot lights.

Thermostat temperature control (30 °C to 90 °C)

Water intake tap.

Drainage with overflow.

Power: 2800 W.

Dimensions: 350 x 775 x 290 mm.

ELECTRICITY

Electric power	KW	
230V -I+N		2,80 2x1,5+T - 16 A
230V - III		
400V - III+N		

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	312	494	0		Prever Interruptor diferencial
COLD WATER	38	494	0	1/2"	Prever llave de corte en la toma
DRAIN	38	199	0	30x25	





700 Series

Bain marie 700

ELECTRIC BAIN-MARIE, BME7-10

1121234500

DIMENSIONS

		Article	Packed
Length	mm	700,00	740,00
Depth	mm	775,00	830,00
Height	mm	290,00	520,00
Weight	Kg	34,00	40,00
Volume	m3	0,16	0,32

ELECTRICITY

Electric power	KW	
230V -I+N		2x4+T - 32 A
230V - III		3x2,5+T - 20 A
400V - III+N		4x2,5+T - 16 A

PLUMBING - WATER

GAS

Not used

VAPOR


Not used

AIRE Comprimido

Not used

ELECTRIC BAIN-MARIE, BME7-10
 Made of stainless steel.
 Tank capacity: 30 litres.
 The tank is designed to accommodate GN containers.
 Built with separators for containers.
 Shielded elements controlled by thermostat. Pilot lights.
 Thermostat temperature control (30 °C to 90 °C)
 Water intake tap.
 Drainage with overflow.
 Power: 6000 W
 Dimensions: 700 x 775 x 290 mm.

Connections	X	Y	Z	Diameter	Information
ELECTRICITY	662	494	0		Prever Interruptor diferencial
COLD WATER	38	494	0	1/2"	Prever llave de corte en la toma
DRAIN	38	199	0	30x25	





700 Series

Charcoals 700

GAS CHARCOAL GRILL, BG7-05 I

1130130000

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	
Length	mm	350,00	390,00	GAS CHARCOAL GRILL, BG7-05 I
Depth	mm	775,00	835,00	Made of stainless steel.
Height	mm	290,00	600,00	Burner in stainless steel with pilot.
Weight	Kg	40,00	48,00	Piezoelectric burner ignition. Safety valve and thermocouple.
Volume	m3	0,08	0,20	Lava rocks.
				Stainless steel grid. Grid dimensions: 340 x 500 mm.
				The angle of the cooking grid can be adjusted to three positions.
				Fat collector.
				Power: 6000 kcal/h (6.98 kW).
				Dimensions: 350 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	6,98
	Kcal/h	6.002,80
LPG	Consumption (kg/h)	0,63
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	0,80
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AS392

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
GAS	310	485	132	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Charcoals 700

GAS CHARCOAL GRILL, BG7-05

1130130070

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	
Length	mm	350,00	390,00	GAS CHARCOAL GRILL, BG7-05
Depth	mm	775,00	835,00	Made of stainless steel.
Height	mm	290,00	600,00	Burner in stainless steel with pilot.
Weight	Kg	40,00	48,00	Piezoelectric burner ignition. Safety valve and thermocouple.
Volume	m3	0,08	0,20	Lava rocks.
				Cast iron grid. Grid dimensions: 340 x 500 mm.
				The angle of the cooking grid can be adjusted to three positions.
				Fat collector.
				Power: 6000 kcal/h (6.98 kW).
				Dimensions: 350 x 775 x 290 mm.

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	6,98
	Kcal/h	6.002,80
LPG	Consumption (kg/h)	0,63
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	0,80
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AS392

<u>Connections</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
GAS	310	485	132	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Charcoals 700

GAS CHARCOAL GRILL, BG7-10 I

1130130500

DIMENSIONS

		Article	Packed	GAS CHARCOAL GRILL, BG7-10 I Made of stainless steel. Burner in stainless steel with pilot. Piezoelectric burner ignition. Safety valve and thermocouple. Lava rocks. Two stainless steel grids. Grid dimensions: 340 x 500 mm. The angle of the cooking grid can be adjusted to three positions. Fat collector. Power: 12.000 kcal/h (13.96 kW). Dimensions: 700 x 775 x 290 mm.
Length	mm	700,00	740,00	
Depth	mm	775,00	835,00	
Height	mm	290,00	600,00	
Weight	Kg	65,00	86,50	
Volume	m3	0,16	0,37	

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Power	KW	13,96
	Kcal/h	12.005,60
LPG	Consumption (kg/h)	1,26
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	1,60
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AS392

Connections	X	Y	Z	Diameter	Information
GAS	660	485	132	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Charcoals 700

GAS CHARCOAL GRILL, BG7-10

1130130570

DIMENSIONS

		Article	Packed	
Length	mm	700,00	740,00	GAS CHARCOAL GRILL, BG7-10
Depth	mm	775,00	835,00	Made of stainless steel.
Height	mm	290,00	600,00	Burner in stainless steel with pilot.
Weight	Kg	65,00	86,50	Piezoelectric burner ignition. Safety valve and thermocouple.
Volume	m3	0,16	0,37	Lava rocks.

ELECTRICITY

0,00
 Power: 12.000 kcal/h (13.96 kW).
 Dimensions: 700 x 775 x 290 mm.

PLUMBING - WATER

GAS

Power	KW	13,96
	Kcal/h	12.005,60
LPG	Consumption (kg/h)	1,26
	Pressure (g/cm2)	37,00
Natural gas	Consumption (m3/h)	1,60
	Pressure (g/cm2)	18,00

VAPOR

Not used


AIRE Comprimido

Not used

Certification EQNET- CE

99AS392

Connections	X	Y	Z	Diameter	Information
GAS	660	485	132	R.3/4"G	Prever regulador y llave de corte individual





700 Series

Neutral elements 700

WORK TOP, EN7-05

1110130000

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	WORK TOP, EN7-05 Made of stainless steel. Removable top for cleaning purposes. Dimensions: 350 x 775 x 290 mm.
Length	mm	350,00	390,00	
Depth	mm	775,00	835,00	
Height	mm	290,00	530,00	
Weight	Kg	20,00	25,00	
Volume	m3	0,08	0,17	

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information





700 Series

Neutral elements 700

WORK TOP, EN7-10

1110130500

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	WORK TOP, EN7-10
Length	mm	700,00	740,00	Made of stainless steel.
Depth	mm	775,00	835,00	Removable top for cleaning purposes.
Height	mm	290,00	530,00	Dimensions: 700 x 775 x 290 mm.
Weight	Kg	29,00	43,00	
Volume	m3	0,16	0,33	

<u>ELECTRICITY</u>		
		0,00


PLUMBING - WATER

GAS
Not used

VAPOR
Not used

AIRE Comprimido
Not used

Connections	X	Y	Z	Diameter	Information





700 Series

Stands 700

STAND, MB7-05

1121731000

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	STAND, MB7-05 Made of stainless steel. Element for adding to the table-top appliances of Range 700 to obtain a compact unit. Dimensions: 350 x 775 x 560 mm.
Length	mm	350,00	395,00	
Depth	mm	775,00	750,00	
Height	mm	560,00	700,00	
Weight	Kg	7,00	11,00	
Volume	m3	0,15	0,21	* Doors are available as an option

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information





700 Series

Stands 700

STAND, MB7-10

1121732000

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	STAND, MB7-10 Made of stainless steel. Element for adding to the table-top appliances of Range 700 to obtain a compact unit. Dimensions: 700 x 775 x 290 mm.
Length	mm	700,00	720,00	
Depth	mm	775,00	740,00	
Height	mm	560,00	700,00	
Weight	Kg	9,00	14,00	
Volume	m3	0,30	0,37	* Doors are available as an option

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information





700 Series

Stands 700

STAND, MB7-15

1121734000

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	STAND, MB7-15
Length	mm	1.050,00	1.200,00	Made of stainless steel.
Depth	mm	775,00	740,00	Element for adding to the table-top appliances of Range 700 to obtain a compact unit.
Height	mm	560,00	700,00	Dimensions: 1050 x 775 x 290 mm.
Weight	Kg	13,00	20,00	
Volume	m3	0,46	0,50	* Doors are available as an option

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



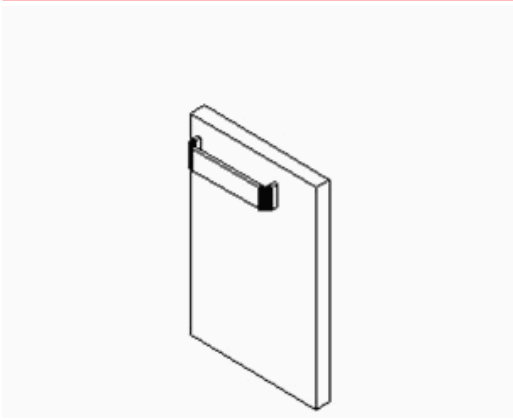

700 Series

Accessories 700 series

RIGHT DOOR 700-S

1100003400

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	RIGHT DOOR 700 SERIES Made of stainless steel. For the MB-700 Supports.
Length	mm	350,00	335,00	
Depth	mm	20,00	705,00	
Height	mm	400,00	160,00	
Weight	Kg	5,00	6,00	
Volume	m3	0,00	0,04	

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



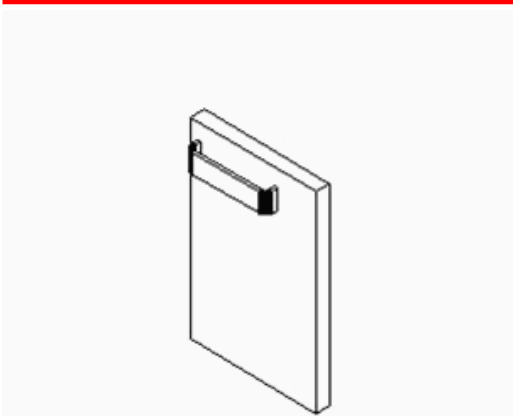

700 Series

Accessories 700 series

LEFT DOOR 700-S

1100003401

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	LEFT DOOR 700-S
Length	mm	700,00	335,00	Made of stainless steel.
Depth	mm	20,00	705,00	For the MB7-00 Supports.
Height	mm	400,00	160,00	
Weight	Kg	9,00	10,00	
Volume	m3	0,01	0,04	

<u>ELECTRICITY</u>		
		0,00


PLUMBING - WATER

GAS
Not used

VAPOR
Not used

AIRE Comprimido
Not used

Connections	X	Y	Z	Diameter	Information





700 Series

Accessories 700 series

KIT OF BRIDGING UNITS 1 MOD. 700-S

1100002548

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	KIT OF BRIDGING UNITS 1 MOD. Made of stainless steel .
Length	mm	700,00	100,00	
Depth	mm	100,00	700,00	
Height	mm	50,00	50,00	
Weight	Kg	12,00	14,00	
Volume	m3	0,00	0,00	
<u>ELECTRICITY</u>			0,00	

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information





700 Series

Accessories 700 series

KIT OF BRIDGING UNITS 1 1/2 MOD. 700-S.

1100002549

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	KIT OF BRIDGING UNITS 1 1/2 MOD. Made of stainless steel .
Length	mm	1.050,00	100,00	
Depth	mm	100,00	1.050,00	
Height	mm	50,00	50,00	
Weight	Kg	18,00	20,00	
Volume	m3	0,01	0,01	

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information





700 Series

Accessories 700 series

KIT OF BRIDGING UNITS 2 MOD. 700-S.

1100002550

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	KIT OF BRIDGING UNITS 2 MOD. Made of stainless steel .
Length	mm	1.400,00	100,00	
Depth	mm	100,00	1.400,00	
Height	mm	50,00	50,00	
Weight	Kg	24,00	26,00	
Volume	m3	0,01	0,01	
<u>ELECTRICITY</u>			0,00	

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information





700 Series

Accessories 700 series

KIT OF BRIDGING UNITS 2 1/2 MOD. 700-S.

1100002551

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	KIT OF BRIDGING UNITS 2 1/2 MOD. Made of stainless steel .
Length	mm	1.750,00	100,00	
Depth	mm	100,00	1.750,00	
Height	mm	50,00	50,00	
Weight	Kg	30,00	32,00	
Volume	m3	0,01	0,01	

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Not used


VAPOR

Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information





700 Series

Accessories 700 series

KIT OF BRIDGING UNITS 3 MOD. 700-S.

1100002552

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	KIT OF BRIDGING UNITS 3 MOD. Made of stainless steel .
Length	mm	2.100,00	100,00	
Depth	mm	100,00	2.100,00	
Height	mm	50,00	50,00	
Weight	Kg	36,00	38,00	
Volume	m3	0,01	0,01	
<u>ELECTRICITY</u>			0,00	

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



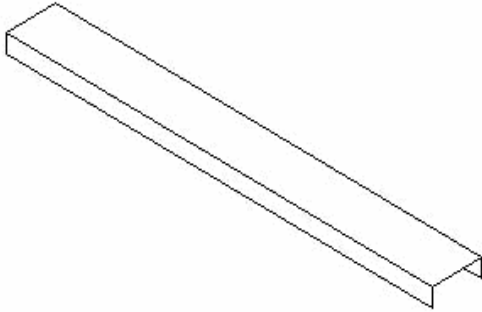

700 Series

Accessories 700 series

MODULES JOINT 700-S

1100002572

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	MODULES JOINT
Length	mm	500,00	40,00	Made of stainless steel .
Depth	mm	40,00	500,00	
Height	mm	10,00	10,00	
Weight	Kg	1,00	2,00	
Volume	m3	0,00	0,00	
<u>ELECTRICITY</u>			0,00	

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



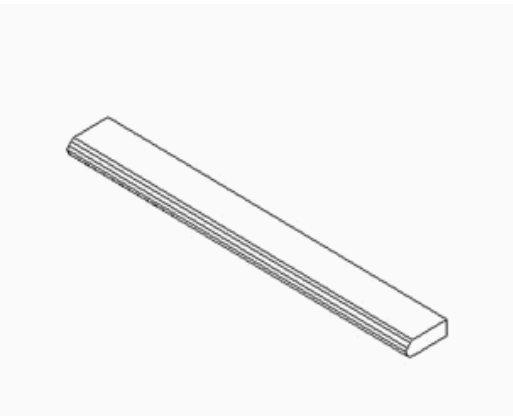

700 Series

Accessories 700 series

FRONT TOP PANEL 1 MODULE

H125409000

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	FRONT TOP PANEL 1 MODULE Made of stainless steel .
Length	mm	700,00	0,00	
Depth	mm	100,00	0,00	
Height	mm	40,00	0,00	
Weight	Kg	4,00	5,00	
Volume	m3	0,00	0,00	
<u>ELECTRICITY</u>			0,00	

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



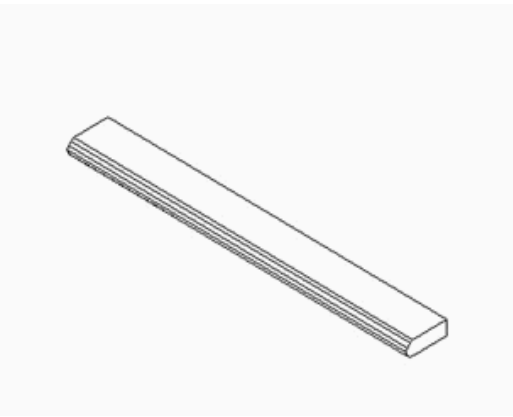

700 Series

Accessories 700 series

FRONT TOP PANEL 1-1/2 MODULES

U915402000

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	FRONT TOP PANEL 1-1/2 MODULES Made of stainless steel .
Length	mm	1.050,00	0,00	
Depth	mm	100,00	0,00	
Height	mm	40,00	0,00	
Weight	Kg	4,00	5,00	
Volume	m3	0,00	0,00	
<u>ELECTRICITY</u>			0,00	

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



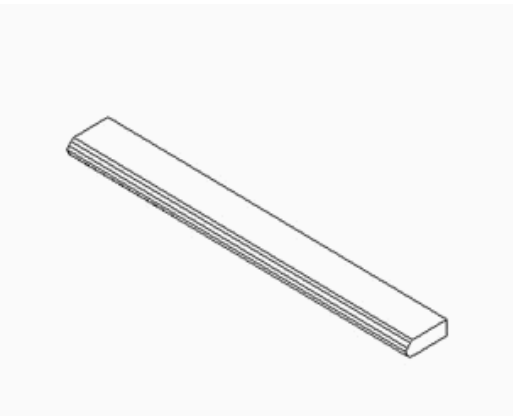

700 Series

Accessories 700 series

FRONT TOP PANEL 2 MOD. 700-S

1100003402

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	FRONT TOP PANEL 2 MODULES
Length	mm	1.400,00	60,00	Made of stainless steel .
Depth	mm	60,00	1.400,00	
Height	mm	40,00	40,00	
Weight	Kg	3,00	4,00	
Volume	m3	0,00	0,00	
<u>ELECTRICITY</u>			0,00	

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



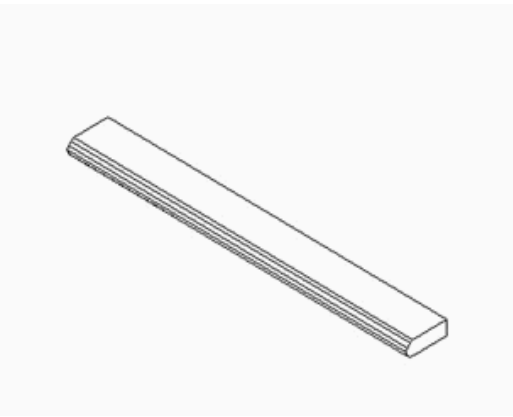

700 Series

Accessories 700 series

FRONT TOP PANEL 2 1/2 MOD. 700-S

1100003403

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	FRONT TOP PANEL 2 1/2 MODULES Made of stainless steel .
Length	mm	1.750,00	60,00	
Depth	mm	60,00	1.750,00	
Height	mm	40,00	40,00	
Weight	Kg	4,00	5,00	
Volume	m3	0,00	0,00	

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



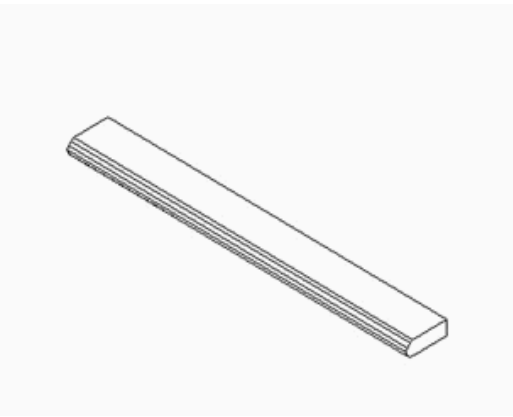

700 Series

Accessories 700 series

FRONT TOP PANEL 3 MOD. 700-S

1100003404

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	FRONT TOP PANEL 3 MODULES Made of stainless steel .
Length	mm	2.100,00	60,00	
Depth	mm	60,00	2.100,00	
Height	mm	40,00	40,00	
Weight	Kg	5,00	6,00	
Volume	m3	0,01	0,01	
<u>ELECTRICITY</u>			0,00	

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



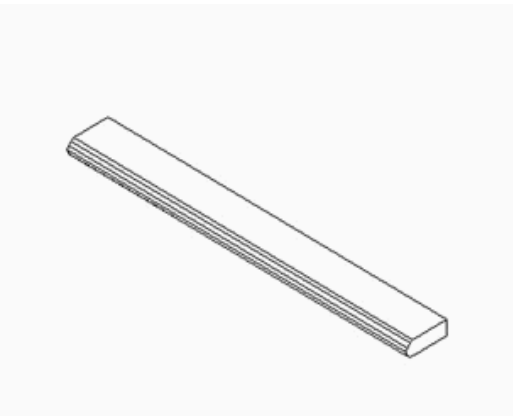

700 Series

Accessories 700 series

FRONT TOP PANEL 3 1/2 MOD. 700-S

1100003405

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	FRONT TOP PANEL 3 1/2 MODULES Made of stainless steel .
Length	mm	2.450,00	60,00	
Depth	mm	60,00	2.450,00	
Height	mm	40,00	40,00	
Weight	Kg	6,00	7,00	
Volume	m3	0,01	0,01	

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



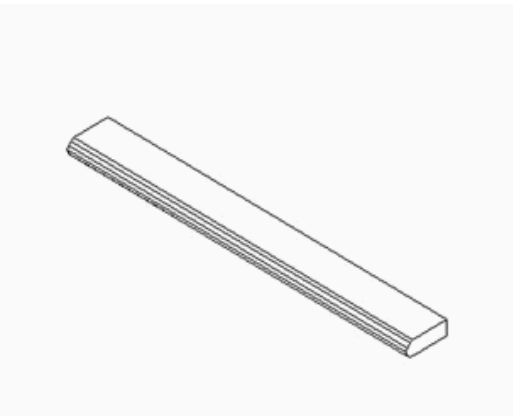

700 Series

Accessories 700 series

FRONT TOP PANEL 4 MOD. 700-S

1100003406

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	FRONT TOP PANEL 4 MODULES Made of stainless steel .
Length	mm	2.800,00	60,00	
Depth	mm	60,00	2.800,00	
Height	mm	40,00	40,00	
Weight	Kg	7,00	8,00	
Volume	m3	0,01	0,01	

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



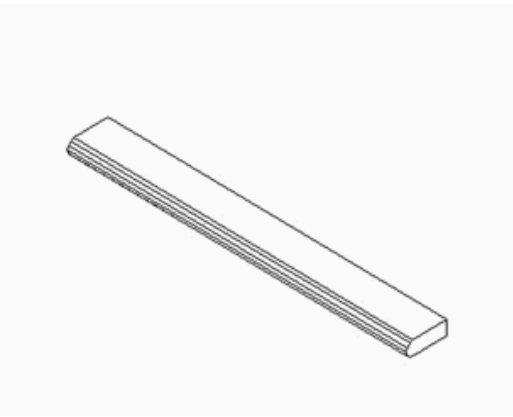

700 Series

Accessories 700 series

FRONT TOP PANEL 4 1/2 MOD. 700-S

1100003407

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	FRONT TOP PANEL 4 1/2 MODULES Made of stainless steel .
Length	mm	3.150,00	60,00	
Depth	mm	60,00	3.150,00	
Height	mm	40,00	40,00	
Weight	Kg	8,00	9,00	
Volume	m3	0,01	0,01	

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



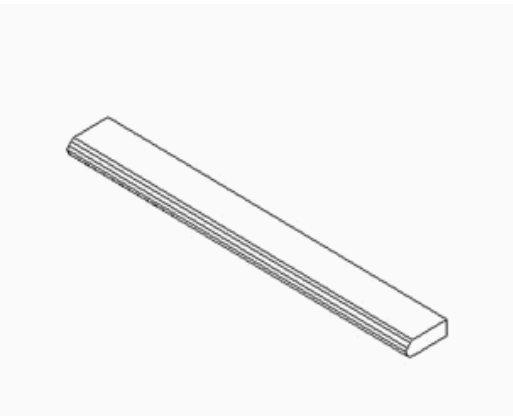

700 Series

Accessories 700 series

FRONT TOP PANEL 5 MOD. 700-S

1100003408

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	FRONT TOP PANEL 5 MODULES Made of stainless steel .
Length	mm	3.500,00	60,00	
Depth	mm	60,00	3.500,00	
Height	mm	40,00	40,00	
Weight	Kg	9,00	10,00	
Volume	m3	0,01	0,01	

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



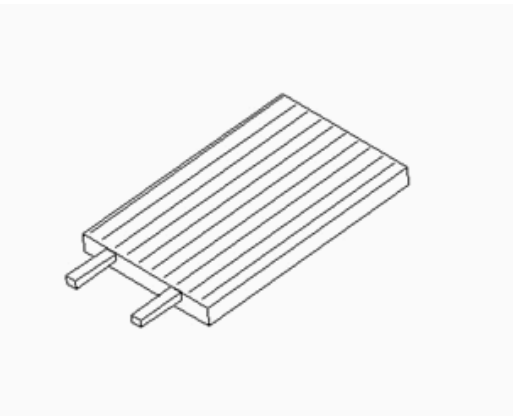

700 Series

Accessories 700 series

CAST IRON GRID FOR CHARCOAL 700

T035464000

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	CAST IRON GRID FOR CHARCOAL 700 Dimensions : 340 x 500 mm.
Length	mm	340,00	0,00	
Depth	mm	500,00	0,00	
Height	mm	0,00	0,00	
Weight	Kg	0,00	0,00	
Volume	m3	0,00	0,00	

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



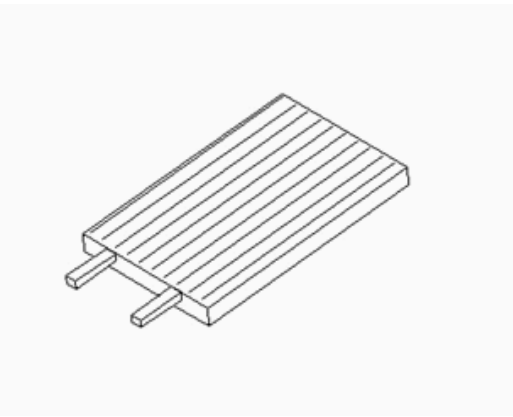

700 Series

Accessories 700 series

STAINLESS STEEL GRID FOR CHARCOAL 700

H125407000

DIMENSIONS

		<u>Article</u>	<u>Packed</u>	STAINLESS STEEL GRID FOR CHARCOAL 700 Dimensions : 340 x 500 mm.
Length	mm	340,00	340,00	
Depth	mm	500,00	500,00	
Height	mm	0,00	0,00	
Weight	Kg	0,00	0,00	
Volume	m3	0,00	0,00	

ELECTRICITY

0,00

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



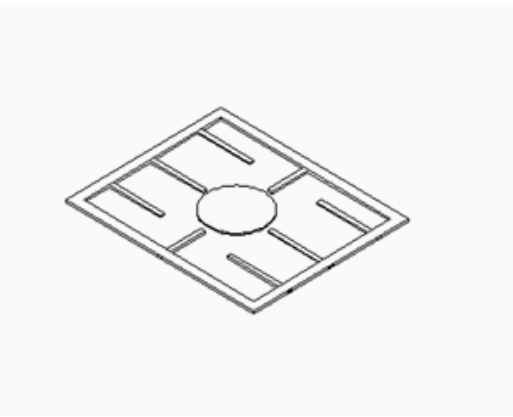

700 Series

Accessories 700 series

GRID FOR OPEN BURNER 700

U915413000

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	GRID FOR OPEN BURNER 700
Length	mm	347,00	0,00	
Depth	mm	310,00	0,00	
Height	mm	0,00	0,00	
Weight	Kg	0,00	0,00	
Volume	m3	0,00	0,00	
<u>ELECTRICITY</u>			0,00	

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



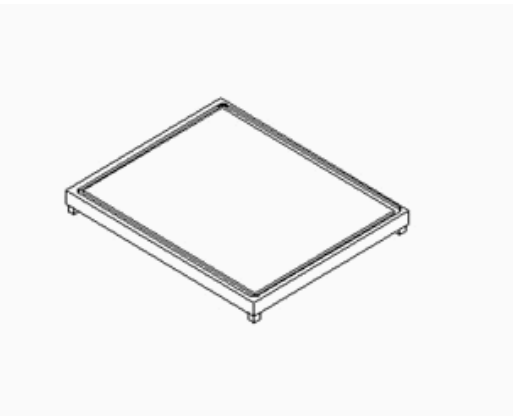

700 Series

Accessories 700 series

PLATE FOR OPEN BURNER 700

U915414000

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	PLATE FOR OPEN BURNER 700
Length	mm	347,00	0,00	
Depth	mm	310,00	0,00	
Height	mm	0,00	0,00	
Weight	Kg	0,00	0,00	
Volume	m3	0,00	0,00	
<u>ELECTRICITY</u>			0,00	

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information



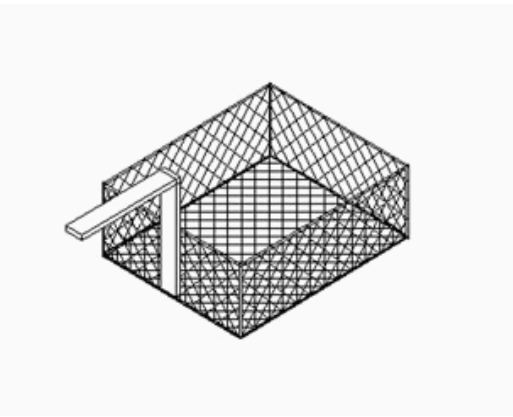

700 Series

Accessories 700 series

BIG BASKET FOR FRYER 700

X316531000

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	BIG BASKET FOR FRYER 700 Dimensions: 250 x 280 x 120 mm.
Length	mm	250,00	0,00	
Depth	mm	280,00	0,00	
Height	mm	120,00	0,00	
Weight	Kg	0,00	0,00	
Volume	m3	0,01	0,00	

<u>ELECTRICITY</u>			
			0,00


PLUMBING - WATER


GAS
Not used

VAPOR
Not used

AIRE Comprimido
Not used

Connections	X	Y	Z	Diameter	Information



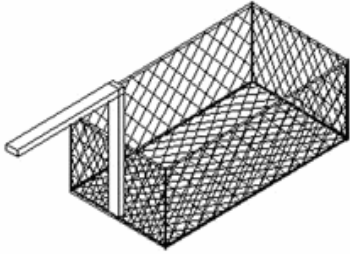

700 Series

Accessories 700 series

LITTLE BASKET FOR FRYER 700

X316532000

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	LITTLE BASKET FOR FRYER 700 Dimensions: 250 x 135 x 120 mm.
Length	mm	250,00	0,00	
Depth	mm	135,00	0,00	
Height	mm	120,00	0,00	
Weight	Kg	0,00	0,00	
Volume	m3	0,00	0,00	

<u>ELECTRICITY</u>	
	0,00


PLUMBING - WATER


GAS
Not used

VAPOR
Not used

AIRE Comprimido
Not used

Connections	X	Y	Z	Diameter	Information





700 Series

Accessories 700 series

2/1-GN BASKET FOR PASTA COOKER 700

H526500000

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	2/1-GN BASKET FOR PASTA COOKER
Length	mm	220,00	220,00	
Depth	mm	170,00	170,00	
Height	mm	230,00	230,00	
Weight	Kg	0,00	0,00	
Volume	m3	0,01	0,00	

<u>ELECTRICITY</u>	
	0,00


PLUMBING - WATER

GAS
Not used

VAPOR
Not used

AIRE Comprimido
Not used

Connections	X	Y	Z	Diameter	Information





700 Series

Accessories 700 series

LITTLE BASKET FOR PASTA COOKER 700

H526501000

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	LITTLE BASKET FOR PASTA COOKER 700
Length	mm	160,00	160,00	
Depth	mm	105,00	105,00	
Height	mm	230,00	230,00	
Weight	Kg	0,00	0,00	
Volume	m3	0,00	0,00	
<u>ELECTRICITY</u>			0,00	

PLUMBING - WATER

GAS

Not used


VAPOR


Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information





700 Series

Accessories 700 series

BIG BASKET FOR PASTA COOKER 700

H526502000

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	BIG BASKET FOR PASTA COOKER
Length	mm	350,00	350,00	
Depth	mm	220,00	220,00	
Height	mm	230,00	230,00	
Weight	Kg	0,00	0,00	
Volume	m3	0,02	0,00	

<u>ELECTRICITY</u>		
		0,00


PLUMBING - WATER

GAS
Not used

VAPOR
Not used

AIRE Comprimido
Not used

Connections	X	Y	Z	Diameter	Information





700 Series

Accessories 700 series

LITTLE BASKET FOR PASTA COOKER 700

H526503000

<u>DIMENSIONS</u>		<u>Article</u>	<u>Packed</u>	LITTLE BASKET FOR PASTA COOKER
Length	mm	160,00	160,00	
Depth	mm	105,00	105,00	
Height	mm	230,00	230,00	
Weight	Kg	0,00	0,00	
Volume	m3	0,00	0,00	
<u>ELECTRICITY</u>			0,00	

PLUMBING - WATER

GAS

Not used

VAPOR

Not used

AIRE Comprimido

Not used

Connections	X	Y	Z	Diameter	Information

