



COUNTERLINE SERIES

IDEAL FOR RESTAURANTS, COMMERCIAL KITCHENS AND FOODSERVICE AREAS WITH NON-GASTRONORM CHILLER REQUIREMENTS.

This series is available in a range of depths, doors and installation heights, making it the perfect solution for restaurants, commercial kitchens and foodservice areas with non-Gastronorm chiller requirements.

Generic Specifications

- Swing door cabinets operating temperature adjustable from +1°C to +4°C in 40°C ambient
- Sliding door cabinets operating temperature adjustable from +1°C to +4°C in 32°C ambient
- Consistent temperatures maintained by fan-forced ducted air flow
- Electronic controller with digital temperature display
- System overheat protection fitted as standard
- Exterior: galvanised steel (powder coated white or optional black) or natural finish stainless steel (excluding galvanised steel top and base)
- Interior: galvanised steel (powder coated white or optional black) or natural finish stainless steel
- Easy plug-in, 10 Amp power supply (230-240V, 50Hz), via mains flex
- Removable sliding doors and extruded track for easy cleaning
- Urethane treated evaporator coil to protect from corrosion
- Left-hand side mounted service compartment as standard
- Two layers of adjustable shelves per door as standard
- Full length, horizontal fluorescent lights and interior light switch
- Full length, ergonomic door handles
- Long life, replaceable magnetic door gaskets
- Insulation: 50mm thick, high density cyclo-isopentane polyurethane foam (CFC, HCFC & HFC free)
- R134a refrigerant (CFC & HCFC free)
- Adjustable legs and swivel castors for easy installation, positioning and relocation

- Cabinets supplied without a countertop as standard (optional 25mm countertop with 65mm fascia)
- Choice of two depths increase space-saving opportunities: Counterline series depth is 680mm, Slimline series depth is 600mm

Self-closing door options


- Swing glass doors with double glazed toughened single low/e safety glass available with silver or black anodised finish
- Sliding glass doors with double glazed toughened single low/e safety glass available in silver or black anodised finish
- Swing solid doors available in stainless steel, white or black to match cabinet finish

Integral Specifications

- Left-hand side mounted, removable SKOPE Cyclone™ refrigeration system as standard with right-hand option
- Plumbing free design

Remote Specifications

- Evaporator box and service compartment on left hand side as standard with right-hand option
- Pipework and drain exit inside service compartment. Rear exit access panel
- Thermostatic expansion valve fitted as standard (to suit R134a or 404A, please specify when ordering)
- See Remote Refrigeration System Specifications on page 102 for more information

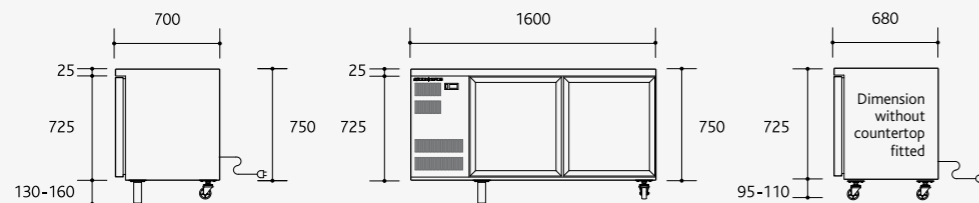

Drawing Depicts: CL400 2SW integral with optional mounting heights
 Optional countertop height 25mm. Countertop fascia height 65mm.
 Adjustable front locking swivel castors (95-110mm high) – total height 820-835mm without countertop.
 Adjustable legs (130-160mm high) – total height 855-885mm without countertop.

SOLID/GLASS DOOR



CL400 - SOLID/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
CL400	127	Integral	Chiller	
CL400	112	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		725	725	545**
Width		1600	1455	1120
Depth***		680	680	565
				Gross Volume
				390 litres
				Total Shelf Area
				1.606m ² (inc. floor)
				Floor Area
				1.09m ² (integral)
				Floor Area
				0.99m ² (remote)


- CL400 remote refrigeration duty 480 Watts




CL600 - SOLID/GLASS DOORS

Model	Weight (kg)	Integral/Remote	Chiller/Freezer	
CL600	140	Integral	Chiller	
CL600	125	Remote	Chiller	
		Integral External (mm)	Remote External (mm)	Internal (mm)
Height*		725	725	545**
Width		2210	2065	1730
Depth***		680	680	565
				Gross Volume
				600 litres
				Total Shelf Area
				2.531m ² (inc. floor)
				Floor Area
				1.50m ² (integral)
				Floor Area
				1.40m ² (remote)


- CL600 remote refrigeration duty 615 Watts

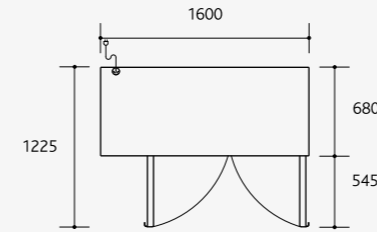


Integral top view

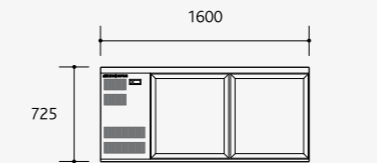


Integral front elevation




Remote front elevation

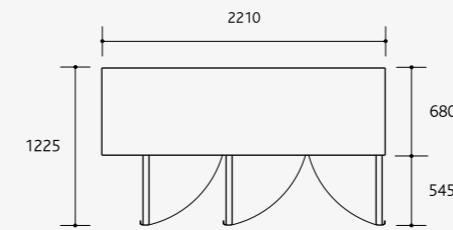

Integral top view

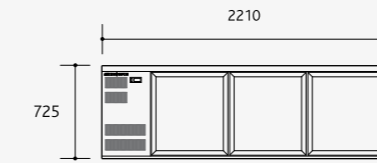

Integral front elevation



Remote front elevation

*Height excludes castors or legs **Smallest available internal height ***Depth excludes worktop
 NB: Photos depict cabinets without optional 25mm countertop




CL800 - SOLID/GLASS DOORS


Model	Weight (kg)	Integral/Remote	Chiller/Freezer
CL800	153	Integral	Chiller
CL800	138	Remote	Chiller

	Integral External (mm)	Remote External (mm)	Internal (mm)	Gross Volume	Total Shelf Area
Height*	725	725	545**	810 litres	3.453m ² (inc. floor)
Width	2820	2675	2340		1.92m ² (integral)
Depth***	680	680	565		1.82m ² (remote)


- CL800 remote refrigeration duty 850 Watts

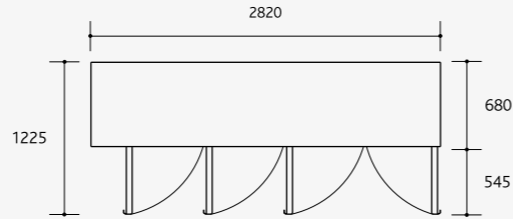


Integral top view

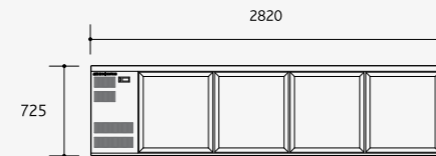


Integral front elevation




Remote front elevation

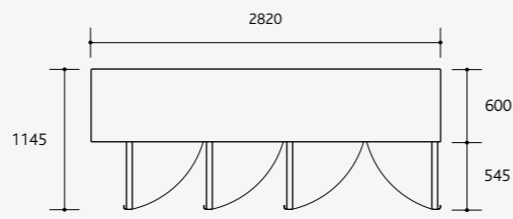

CC700 integral top view

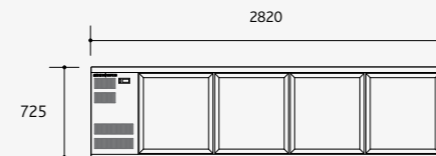

CC700 integral front elevation

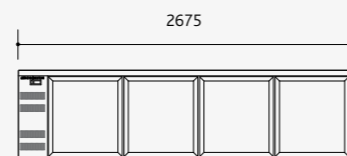

CC700 remote front elevation

The Slimline chiller cabinets are built to the same specifications as the Counterline series. With 80mm less depth, they are designed to fit into smaller kitchens and workspaces.

SLIMLINE SPECIFICATIONS

Integral Model	Gross Volume (Litres)	Total Shelf Area (inc. floor)	Floor Area
CC300	335	1.48m ²	0.96m ²
CC500	517	2.29m ²	1.33m ²
CC700	700	3.11m ²	1.7m ²

Remote Model	Gross Volume (Litres)	Total Shelf Area (inc. floor)	Floor Area	Refrigeration Duty (Watts)
CC300r	335	1.48m ²	0.87m ²	400 Watts
CC500r	517	2.29m ²	1.23m ²	540 Watts
CC700r	700	3.11m ²	1.6m ²	660 Watts

- Depth for integral and remote Slimline cabinets is 600mm (excluding and including worktop)
- ✓ High Energy Efficiency - CC500 & CC700

*Height excludes castors or legs **Smallest available internal height ***Depth excludes worktop
NB: Photos depict cabinets without optional 25mm countertop



TROPICAL GLASS DOOR OPTIONS

SOLENOID VALVE (REMOTES ONLY)

DOOR LOCK KIT

EXTRA SHELVES PER DOOR

S/S COUNTERTOP (+25mm)

R/H INTEGRAL OR REMOTE SYSTEM

SLIDING DOORS

AVAILABLE AS

COUNTERLINE CHILLERS

	DOUBLE LOW/EARGON	HEATED GLASS (SWING DOORS ONLY)
CL400	n/a	n/a
CL400	n/a	n/a
CL600	n/a	n/a
CL600	n/a	n/a
CL800	n/a	n/a
CL800	n/a	n/a
CC300	n/a	n/a
CC300	n/a	n/a
CC500	n/a	n/a
CC500	n/a	n/a
CC700	n/a	n/a
CC700	n/a	n/a

NOTE: Solid doors are swing only.