

HEAT-FLO

GAS RADIANT HEATERS




2-TILE

16 MJ
HEAT
OUTPUT




3-TILE

25 MJ
HEAT
OUTPUT

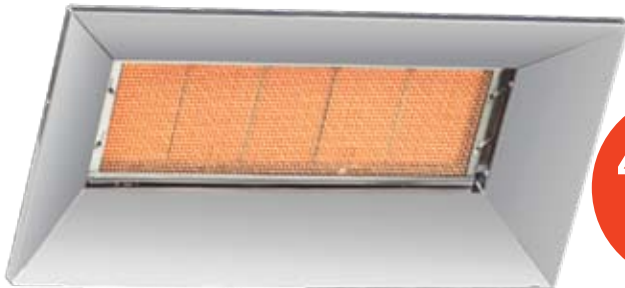

5-TILE

45 MJ
HEAT
OUTPUT

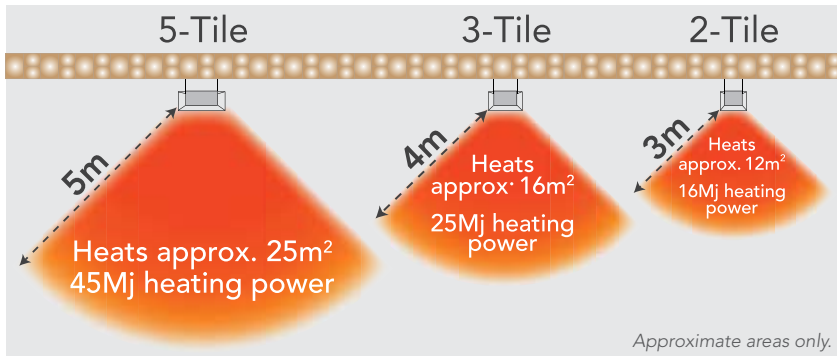


FEATURES:

- Suitable for outdoor and non-residential indoor use*
- Manual Piezo Ignition
- Flame safeguard system to ensure safety
- Includes wall-mounting bracket
- 12 Months Warranty
- Designed for commercial applications* such as restaurants, warehouses and factories.
- AGA gas approval

ACCESSORIES*

- Moveable trolley & stand - designed for both 9kg and 45kg cylinders (see image)
- Heat Deflector - for low clearance installations
- Heat-Flo Surround - stainless steel housing which adds neatness to the heater installation.

Moveable Trolley & Stand
(Part no. 2620160)

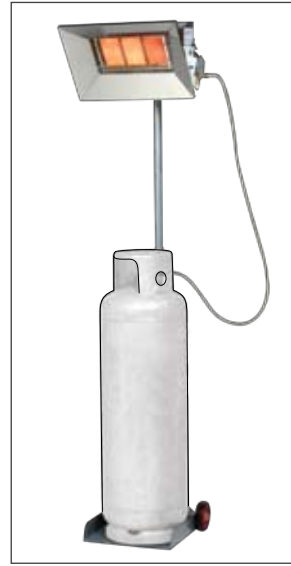

(Gas cylinder not included)
(Not for use with 5-tile model)

Heat Deflector
(See table for part numbers)



Heat-Flo Surround
(See table for part numbers)



SPECIFICATIONS

No. of Tiles		2 Tiles	3 Tiles	5 Tiles
Heat-Flo Part no.	LPG*	2620110	2620100	2620120
	Natural Gas*	2620111	2620101	2620121
Heat Deflector Part no.		2620164	2620162	2620170
Heat-Flo Surround Part no.		2620171	2620161	2620172
Heat Output on LPG (Mj) (BTU)		16Mj (17,000 BTU)	25Mj (25,300 BTU)	45Mj (42,000 BTU)
Approximate area heated in m ²		12m ²	16m ²	25m ²
Gas consumption per 45kg		135 hours approx.	90 hours approx.	50 hours approx.
Dimensions (WxHxDmm)		387 x 334 x 180mm	499 x 334 x 180mm	695 x 334 x 180mm
Weight (kg)		3.9	5.8	7.1
Ceiling clearance required (mm)		1100mm (without heat deflector)		
Stand dimensions (WxDxH)		480 x 430 x 1200mm		n/a

*Must only be installed by a licensed technician

*Must complete "Installation Checklist" before installing (contact Bromic for more information)

MINIMUM INSTALLATION CLEARANCES

